




MORRIS CAT#: 12116-12121
Non-Insulated Reducing Butt Splice Connectors

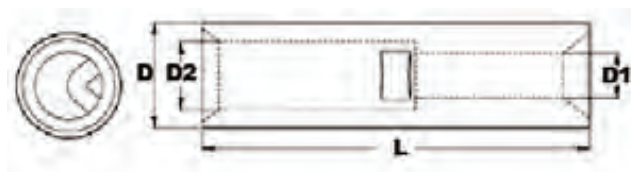

Features:

Non-Insulated Reducing Butt Splice Connectors features include:

- Non-Insulated Reducing Butt Splice Connectors features Step-Down Barrel that allows for transition from larger to smaller conductor in a simple In-Line Splice
- Non-Insulated Reducing Butt Splice Connectors Material: Electrolytic Tubular Copper
- Electro-Tin Plated for corrosion resistance
- Non-Insulated Reducing Butt Splice Connectors has Center Wire Stop Barrier
- Maximum Electric Current: 26 AWG - 5.5 Amp, 24 AWG - 7 Amp, 22 AWG - 9 Amp, 20 AWG - 12 Amp, 18 AWG - 17 Amp, 16 AWG - 18 Amp, 14 AWG - 30 Amp, 12 AWG - 35 Amp, 10 AWG - 50 Amp, 8 AWG - 70 Amp, 6 AWG - 95 Amp, 4 AWG - 125 Amp
- 302°F(150°C) 600 Volts Max
- cULus Listed
- Dimension Measurements = Inches
- Order Qty of 100 = 1 Bag of 100

MAXIMUM ELECTRIC CURRENT:

AWG	26	24	22	20	18	16	14	12	10	8	6	4
AMP	5.5	7	9	12	17	18	30	35	50	70	95	125

MAXIMUM ELECTRIC RATING: 302°F (150°C) 600 Volts

TERMINAL MATERIAL: Electro-Tin Plated Copper

DIMENSIONS = INCHES

CAT. NO.	WIRE RANGE AWG	L	D	D1	D2	BAG QTY	MASTER BAG QTY
12116	16-14 TO 22-18	.591	.154	.067	.091	100	1,000
12117	12-10 TO 22-18	.787	.213	.067	.134	100	1,000
12118	12-10 TO 16-14	.787	.213	.091	.138	100	1,000
12119	8 TO 16-14	.827	.067	.091	.181	100	1,000
12120	8 TO 12-10	.827	.067	.138	.181	100	1,000
12121	6 TO 8	1.024	.351	.181	.232	100	1,000