




MORRIS CAT#: 12192-12194
Nylon Insulated Butt Splice Connectors Flared
Entry

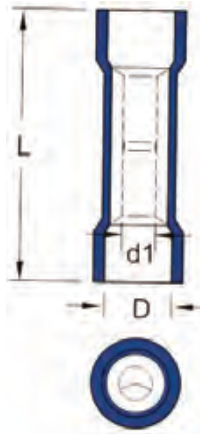

Features:

Nylon Insulated Butt Splice Connectors Flared Entry features include:

- Nylon Insulated Butt Splice Connectors Flared Entry Material: High Strength Electrolytic Tubular Copper
- Electro-Tin Plated for corrosion resistance
- Nylon Insulated Butt Splice Connectors Flared Entry has Center Wire Stop Barrier
- Color Coded Insulation for easy identification
- Easy Entry Expanded Insulation eliminates strand “Hang Up”, increasing crimping rates and provides mechanical strain relief
- Maximum Electric Current: 26 AWG - 5.5 Amp, 24 AWG - 7 Amp, 22 AWG - 9 Amp, 20 AWG - 12 Amp, 18 AWG - 17 Amp, 16 AWG - 18 Amp, 14 AWG - 30 Amp, 12 AWG - 35 Amp, 10 AWG - 50 Amp
- 221°F(105°C) 600 Volts Max
- cULus Listed
- Dimension Measurements = Inches
- Order Qty of 100 = 1 Bag of 100

MAXIMUM ELECTRIC CURRENT:

AWG	22	20	18	16	14	12	10
AMP	9	12	17	18	30	35	50

MAXIMUM ELECTRIC RATING: 221°F (105°C) 600 Volts

CONNECTOR MATERIAL: Copper

INSULATION MATERIAL: Nylon

FEATURES: Expanded Insulation

DIMENSIONS = INCHES

CAT. NO.	COLOR	WIRE SIZE AWG	L	D	D1	BAG QTY	MASTER BAG QTY
12192	RED	22-16	.992	.157	.067	100	1,000
12193	BLUE	16-14	.992	.177	.091	100	1,000
12194	YELLOW	12-10	1.11	.248	.134	100	1,000