



Catalog Number	12260
UPC Number	60198612260
Description	Heat Shrinkable Fork Terminals 16-14 AWG



Features


Color Coded HD Polyethylene Heat Shrink insulation
Manufactured from high strength copper alloy
Electro-tin plated for corrosion resistance
Expanded Insulation funnel entry eliminates strand "Hang Up", increases the crimping rates and the reliability of the termination
Wire range stamped on the surface for easy interpretation
Brazed seam prevent splitting under maximum pressure
Serrated barrel & flared position of sleeve provides excellent contact & mechanical stress relief at insulation & barrel junction

General

Insulation Type	High Density Polyethylene Heat Shrink
Material	Copper
Finish	Electro-tin plated
Color	Blue
Wire Range	16-14 AWG
Stud Size	#8

Dimension Information

L Inches (mm)	1.161
W Inches (mm)	0.283
d2 Inches (mm)	0.169
T Inches (mm)	0.031



Specifications

Temperature Rating	105°C
Voltage Rating	600 V
Flammability Rating	UL94V-O
Amp Rating	14 AWG 30 Amps
	16 AWG 18 Amps

Packaging




Bag Qty	100
Master Bag Qty	1000

Certifications

UL	Yes
cUL	Yes
RoHS	Yes

Morris Products 53 Carey Road, Queensbury, NY 12804

www.morrisproducts.com

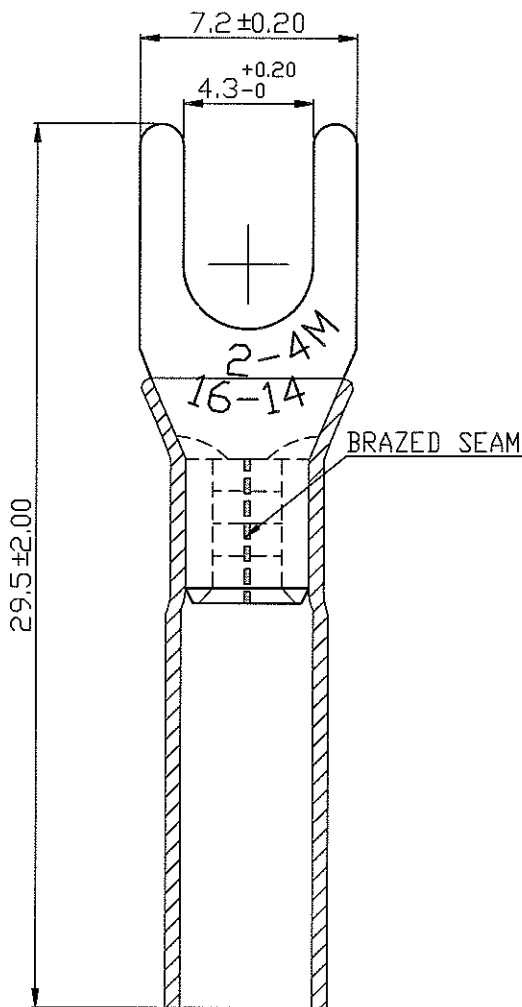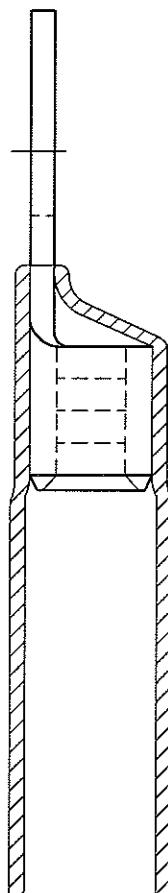

REV	DESCRIPTION	DATE
Δ	RDK-97140	2008/07/04

NOTE :

1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	16	14
AMP.	18	30
2. MAXIMUM ELECTRICAL RATING : 600 VOLTS MAX.
3. SHRINK TEMP. : 150°C
- Δ 4. OPERATING TEMP. : -40°C~+105°C
5. INSULATION MATERIAL : HIGH DENSITY PE.
6. INSULATED COLOR : BLUE
7. WIRE RANGE : 16-14 A.W.G. (1.5-2.5 mm²)
8. TERMINAL MATERIAL : COPPER
9. TERMINAL SURFACE TREATMENT : TIN PLATED
10. TERMINAL THICKNESS : 0.8 mm

Tolerance Unless Otherwise Specified		
0 > 6 mm ± 0.20	ANGLE	
6 > 18 mm ± 0.30	0°	REF ±
18 > 30 mm ± 0.40	°	±
30 > 75 mm ± 0.50	°	±

NAME	HEAT SHRINKABLE-SPADE TERMINALS HB (BRAZED TYPE)				UNIT	
PART NO.	12260	MATERIAL	-----	APPROVE		
NUMBER		SCALE	SHEET	PAGE	CHECKED	
DATE	2005/02/16	4/1	1-1	10F2	DRAWN	

Morris Products Inc.