




MORRIS CAT#: 12277-12279
DHeat Shrinkable Fully Insulated Male
Disconnects

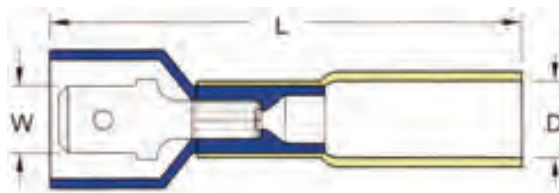

Features:

Heat Shrinkable Nylon Fully Insulated Male Disconnects features include:

- Heat Shrinkable Nylon Fully Insulated Male Disconnect Material: High Strength Brass
- Electro-Tin Plated for corrosion resistance
- Insulation Material: Nylon & High Density PE Heat Shrink
- Serrated Barrel provides excellent electrical contact & resistance to pull-out forces
- Double Crimp Extended Crimp Sleeve provides for multiple crimps resulting in improved electrical contact and pull-out force resistance
- Max Current: 22 AWG - 3 Amp, 20 AWG - 4 Amp, 18 AWG - 7 Amp, 16 AWG - 10 Amp, 14 AWG - 15 Amp, 12 AWG - 20 Amp, 10 AWG - 24 Amp
- Max Ratings: 300 Volts
- Shrink Temp: 302°F (150°C)
- Resistant Temp: 14°F ~ 221°F (-26°C ~ 105°C)
- cULus Listed
- Dimension Measurements = Inches
- Order Qty of 100 = 1 Bag of 100

MAXIMUM ELECTRIC CURRENT:

AWG	22	20	18	16	14	12	10
AMP	3	4	7	10	15	20	24

MAXIMUM ELECTRIC RATING: 300 Volts

SHRINK TEMP: 302°F (150°C)

RESISTANT TEMP: -40°F ~ 221°F (-40°C ~ 105°C)

INSULATION MATERIAL: Nylon & High Density PE Heat Shrink

TERMINAL MATERIAL: Electro-Tin Plated Brass

DIMENSIONS = INCHES

CAT. NO.	COLOR	WIRE SIZE AWG	TAB SIZE	L	W	D	BAG QTY	MASTER BAG QTY
12277	RED	22-16	.032 X .250	1.516	.25	.256	100	1,000
12278	BLUE	16-14	.032 X .250	1.555	.25	.256	100	1,000
12279	YELLOW	12-10	.032 X .250	1.555	.26	.295	100	1,000