



Catalog Number 12314
UPC Number 60198612314
Description Heat Shrinkable Bullet Disconnect
16-14 AWG
.157 OD

Features

Color Coded HD Polyethylene Heat Shrink insulation
Manufactured from high strength copper alloy
Electro-tin plated for corrosion resistance
Expanded Insulation funnel entry eliminates strand “Hang Up”, increases the crimping rates and the reliability of the termination
Wire range stamped on the surface for easy interpretation
Brazed seam prevent splitting under maximum pressure
Serrated barrel & extended copper crimp sleeve provide excellent electrical contact, pull-out resistance & mechanical stress relief




General

Insulation Type High Density Polyethylene Heat Shrink
Material Copper
Finish Electro-tin plated
Color Blue
Wire Range 16-14 AWG
Bullet OD .157

Dimension Information

L Inches (mm) 1.299
W Inches (mm) 0.157
D Inches (mm) 0.236



Specifications

Temperature Rating 105°C
Voltage Rating 300 V
Flammability Rating UL94V-O
Amp Rating 14 AWG 15 Amps
16 AWG 10 Amps

Packaging

Bag Qty 100
Master Bag Qty 1000

Certifications


UL Yes
cUL Yes
RoHS Yes

Morris Products 53 Carey Road, Queensbury, NY 12804

www.morrisproducts.com



REV	DESCRIPTION	DATE
△ RDK-97140		2008/07/11

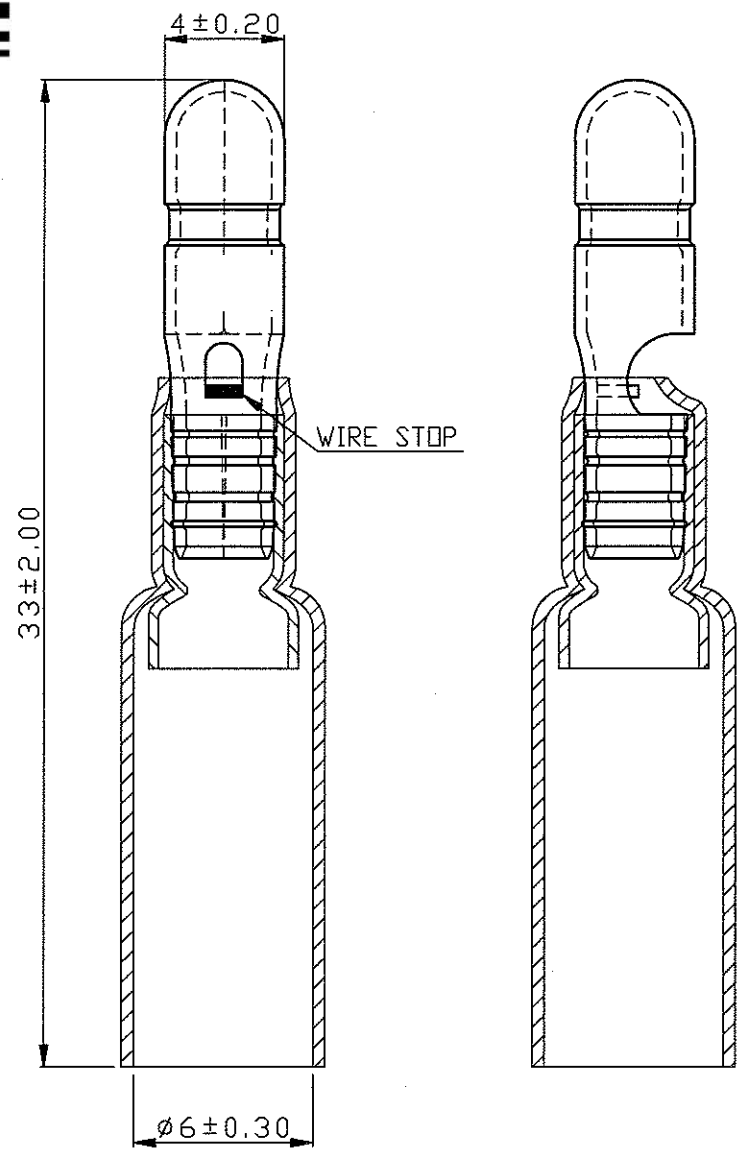

- NOTE :
1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	16	14	
AMP.	10	15	
 2. MAXIMUM ELECTRICAL RATING : 300 VOLTS MAX.
 3. SHRINK TEMP. : 150°C △
 4. OPERATING TEMP. : -40°C~+105°C
 5. INSULATION MATERIAL : HIGH DENSITY PE.
 6. INSULATION MATERIAL : WITH COPPER SLEEVE ON BARREL
 7. INSULATEDN COLOR : BLUE
 8. WIRE RANGE : 16-14 A.W.G. (1.5-2.5 mm²)
 9. TERMINAL MATERIAL : BRASS
 10. TERMINAL SURFACE TREATMENT : TIN PLATED
 11. TERMINAL THICKNESS : 0.40 mm

Tolerance Unless Otherwise Specified	
0 > 6 mm ± 0.20	ANGLE
6 > 18 mm ± 0.30	0° REF ±
18 > 30 mm ± 0.40	° ±
30 > 75 mm ± 0.50	> ° ±

NAME	HEAT SHRINKABLE-BULLET DISCONNECTORS *HD*(DOUBLE CRIMP TYPE)			UNIT	<input type="checkbox"/> <input type="checkbox"/>
PART NO.	12314	MATERIAL	-----	APPROVE	
NUMBER		SCALE	SHEET	PAGE	CHECKED
DATE	2005/12/27	4/1	1-1	10F2	DRAWN

Morris Products Inc.