MORRIS CAT#: 12319-12320
Heat Shrinkable Nylon Fully Insulated Bullet Disconnects

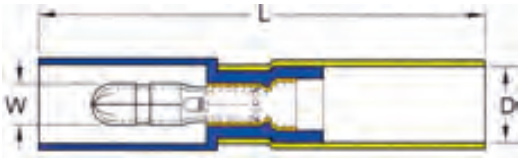

Features:

Heat Shrinkable Nylon Fully Insulated Bullet Disconnects features include:

- Heat Shrinkable Nylon Fully Insulated Bullet Disconnect Material: High Strength Brass
- Electro-Tin Plated for corrosion resistance
- Butted Seam
- Insulation Material: Nylon & High Density PE
- Serrated Barrel provides excellent electrical contact & resistance to pull-out forces
- Double Crimp Extended Crimp Sleeve provides for multiple crimps resulting in improved electrical contact and pull-out force resistance
- Max Current: 22 AWG - 3 Amp, 20 AWG - 4 Amp, 18 AWG - 7 Amp, 16 AWG - 10 Amp, 14 AWG - 15 Amp, 12 AWG - 20 Amp, 10 AWG - 24 Amp
- Max Ratings: 300 Volts
- Shrink Temp: 302°F (150°C)
- Resistant Temp: 14°F ~ 221°F (-10°C ~ 105°C)
- cULus Listed
- Dimension Measurements = Inches
- Order Qty of 100 = 1 Bag of 100

MAXIMUM ELECTRIC CURRENT:

AWG	22	20	18	16	14
AMP	3	4	7	10	15

MAXIMUM ELECTRIC RATING: 300 Volts
SHRINK TEMP: 302°F (150°C)
INSULATION MATERIAL: Nylon with High Density PE Heat Shrink
TERMINAL MATERIAL: Electro-Tin Plated Tubular Brass

DIMENSIONS = INCHES

CAT. NO.	COLOR	WIRE SIZE AWG	DIA (W)	L	W	D	BAG QTY	MASTER BAG QTY
12319	RED	22-16	.157	1.654	.25	.256	100	1,000
12320	BLUE	16-14	.157	1.555	.25	.256	100	1,000