




MORRIS CAT#: 12331
Heat Shrinkable Butt Splices 26-22

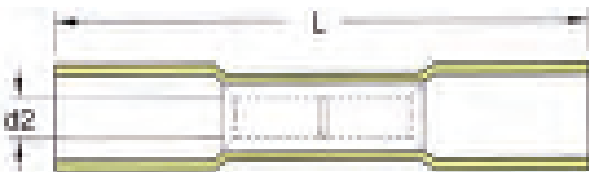

Features:

Heat Shrinkable Butt Splices 26-22 features include:

- Heat Shrinkable Butt Splice Material: High Strength Tubular Copper
- Electro-Tin Plated for corrosion resistance
- Insulation Material: High Density PE
- Easy Entry Expanded Insulation eliminates strand “Hang Up”, increasing crimping rates and provides mechanical strain relief
- Max Current: 22 AWG - 9 Amp, 20 AWG - 12 Amp, 18 AWG - 17 Amp, 16 AWG - 18 Amp, 14 AWG - 30 Amp, 12 AWG - 35 Amp, 10 AWG - 50 Amp
- Max Ratings: 600 Volts
- Shrink Temp: 302°F (150°C)
- Resistant Temp: 14°F ~ 221°F (-26°C ~ 105°C)
- cULus Listed
- Dimension Measurements = Inches
- Order Qty of 100 = 1 Bag of 100

MAXIMUM ELECTRIC CURRENT:

AWG	22	20	18	16	14	12	10
AMP	9	12	17	18	30	35	50

MAXIMUM ELECTRIC RATING: 600 Volts

SHRINK TEMP: 302°F (150°C)

RESISTANT TEMP: 14°F ~ 221°F (-26°C ~ 105°C)

INSULATION MATERIAL: High Density PE Heat Shrink

TERMINAL MATERIAL: Electro Tin Plated Tubular Copper

DIMENSIONS = INCHES

CAT. NO.	COLOR	WIRE SIZE AWG	D2	L	BAG QTY	MASTER BAG QTY
12331	CLEAR	26-22	.051	1.138	100	1,000