




MORRIS CAT#: 12345-12348
Heat Shrinkable Parallel Splices - Solder

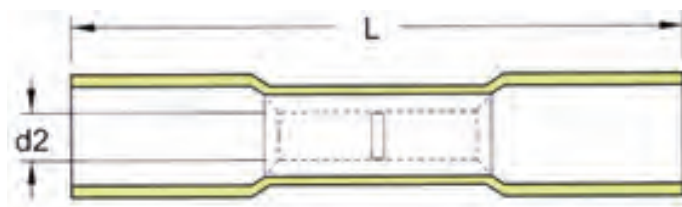

Features:

Heat Shrinkable Parallel Splices - Solder features include:

- Heat Shrinkable Parallel Splices - Solder Material: Tubular Tin
- Electro-tin plated for corrosion resistance
- Insulation Material: High Density PE Heat Shrink
- Maximum Electric Current: 22 AWG - 9 Amp, 20 AWG - 12 Amp, 18 AWG - 17 Amp, 16 AWG - 18 Amp, 14 AWG - 30 Amp, 12 AWG - 35 Amp, 10 AWG - 50 Amp
- Maximum Electric Rating: 600 Volts
- Shrink Temp: 302°F (150°C)
- Resistant Temp: -40°F ~ 221°F (-40°C ~ 105°C)
- cULus Listed
- Dimension Measurements = Inches
- Order Qty of 100 = 1 Bag of 100

MAXIMUM ELECTRIC CURRENT:

AWG	26	24	22	20	18	16	14	12	10
AMP	5.5	7	9	12	17	18	30	35	50

MAXIMUM ELECTRIC RATING: 600 Volts

SHRINK TEMP: 221°F (105°C)

INSULATION MATERIAL: High Density PE Heat Shrink

TERMINAL MATERIAL: Tubular Tin Solder

Note: This is a Solder (not crimp) termination

DIMENSIONS = INCHES

CAT. NO.	COLOR CODE	WIRE RANGE AWG	L	DI	D	BAG QTY	MASTER BAG QTY
12345	CLEAR	26-22	.98	.098	.138	100	1,000
12346	RED	22-16	1.46	.165	.217	100	1,000
12347	BLUE	16-14	1.46	.185	.252	100	1,000
12348	YELLOW	12-10	1.65	.236	.315	100	1,000