




Catalog Number 12412
UPC Number 60198612412
Description Non Insulated
 Right Angle Flag Female Disconnect
 22-18 AWG

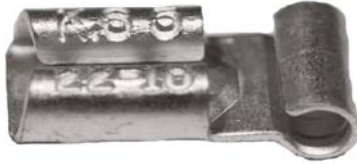


Features

- Manufactured from high strength copper alloy
- Electro-tin plated for corrosion resistance
- Wire range stamped on the surface for easy interpretation
- Brazed seam prevents splitting under maximum pressure
- Pre-formed barrel provides excellent electrical contact & pull-out force resistance

General

Insulation Type N/A
 Material Brass
 Finish Electro-Tin Plated
 Color N/A
 Wire Range 22-18
 Tab Size .020 X .187



Dimension Information

Stock Thickness 0.016
 L Inches (mm) 0.445
 B Inches (mm) 0.217
 F Inches (mm) 0.244
 W Inches (mm) 0.197

Specifications

Temperature Rating 150°C
 Voltage Rating 300 V
 Flammability Rating UL94V-O
 Amp Rating 22 AWG 3 Amps
 20 AWG 4 Amps
 18 AWG 7 Amps

Packaging


Bag Qty 100
 Master Bag Qty 1000

Certifications

UL Yes
 cUL Yes
 RoHS Yes

Morris Products 53 Carey Road, Queensbury, NY 12804

www.morrisproducts.com

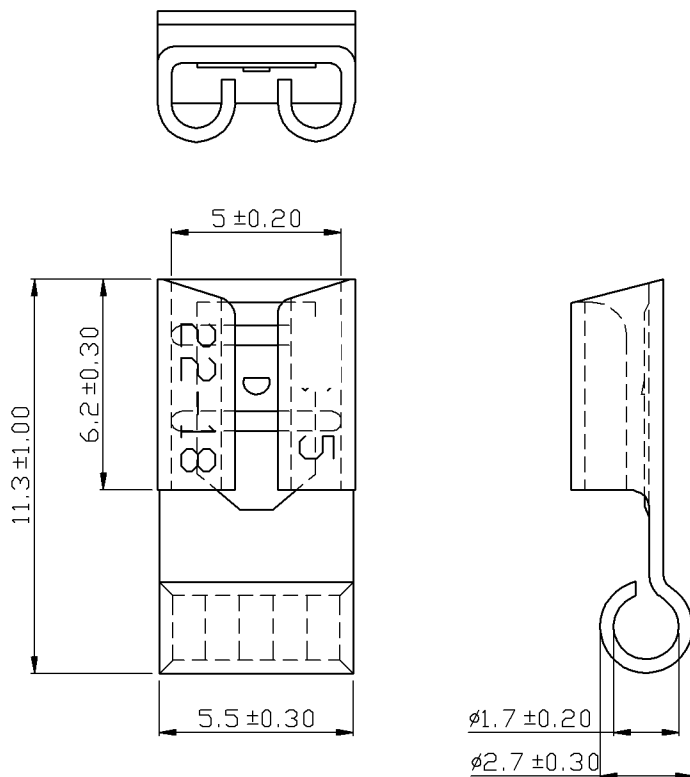

NOTE:

1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	22	20	18
AMP.	3	4	7
2. WIRE RANGE : 22-18 A.W.G. ($0.5-0.75 \text{ mm}^2$)
3. SURFACE TREATMENT : TIN PLATED

Tolerance Unless Otherwise Specified			
0	>6 mm ± 0.20	ANGLE	
6	>18 mm ± 0.30	0°	° REF $\pm$
18	>30 mm ± 0.40	°	° $\pm$
30	>75 mm ± 0.50	°	° $\pm$

NAME	NON-INSULATED FLAG FEMALE DISCONNECTORS (NORMAL TYPE)				UNIT	mm	
PART NO.	12412	MATERIAL	BRASS	APPROVE			
NUMBER		SCALE	SHEET	PAGE	CHECKED		
DATE	2006/10/30	5/1	1-0	10F1	DRAWN		

Morris Products Inc.