




Catalog Number	12416
UPC Number	60198612416
Description	Non Insulated Right Angle Flag Female Disconnect 22-18 AWG

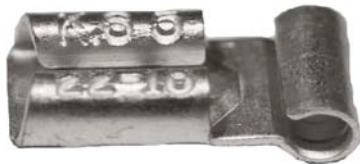


Features

- Manufactured from high strength copper alloy
- Electro-tin plated for corrosion resistance
- Wire range stamped on the surface for easy interpretation
- Brazed seam prevents splitting under maximum pressure
- Pre-formed barrel provides excellent electrical contact & pull-out force resistance

General

Insulation Type	N/A
Material	Brass
Finish	Electro-Tin Plated
Color	N/A
Wire Range	22-18
Tab Size	.032 X .250



Dimension Information

Stock Thickness	0.016
L Inches (mm)	0.551
B Inches (mm)	0.291
F Inches (mm)	0.299
W Inches (mm)	0.26

Specifications

Temperature Rating	150°C
Voltage Rating	300 V
Flammability Rating	N/A
Amp Rating	22 AWG 3 Amps
	20 AWG 4 Amps
	18 AWG 7 Amps

Packaging

Bag Qty	100
Master Bag Qty	1000

Certifications



UL	Yes
cUL	Yes
RoHS	Yes

Morris Products 53 Carey Road, Queensbury, NY 12804

www.morrisproducts.com



REV	DESCRIPTION	DATE
△	RDK-96069	2007/07/18
△	RDK-96036	2008/07/01

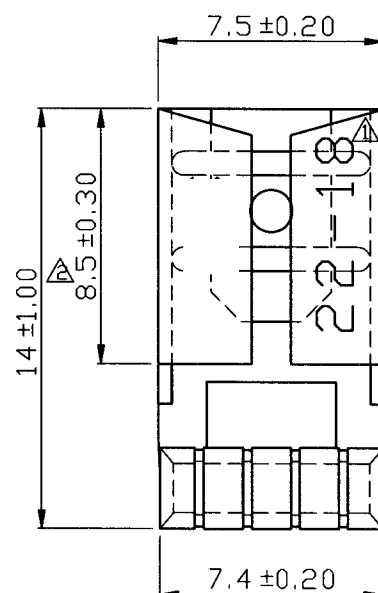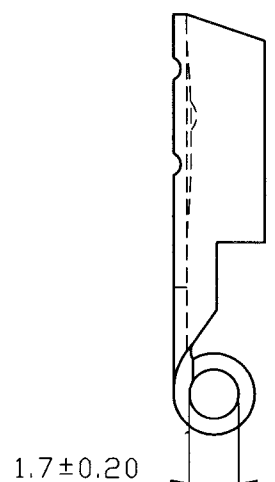

NOTE :

1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	22	20	18
AMP.	3	4	7
2. WIRE RANGE : 22-18 A.W.G. (0.5-0.75 mm²)
3. NEMA TAB : 0.032 inch * 0.250 inch (0.8 mm * 6.35 mm)
4. SURFACE TREATMENT : TIN PLATED
5. THICKNESS : 0.45 mm

Tolerance Unless Otherwise Specified	
0 > 6 mm ± 0.20	ANGLE
6 > 18 mm ± 0.30	0° ± REF ±
18 > 30 mm ± 0.40	±
30 > 75 mm ± 0.50	±

NAME	NON-INSULATED FLAG FEMALE DISCONNECTORS(NORMAL TYPE)				UNIT	
PART NO.	12416	MATERIAL	-----	APPROVE		
NUMBER		SCALE	SHEET	PAGE	CHECKED	
DATE	2006/07/17	4/1	1-2	10F2	DRAWN	

Morris Products Inc.