





Catalog Number	12422
UPC Number	60198612422
Description	Non Insulated Right Angle Flag Female Disconnect 16-14 AWG

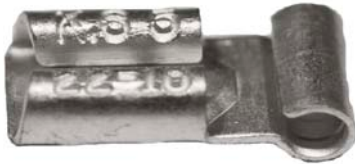

Features

- Manufactured from high strength copper alloy
- Electro-tin plated for corrosion resistance
- Wire range stamped on the surface for easy interpretation
- Brazed seams prevent splitting under maximum pressure
- Serrated barrel provides excellent electrical contact & pull-out force resistance

General

Insulation Type	N/A
Material	Brass
Finish	Electro-Tin Plated
Color	N/A
Wire Range	16-14
Tab Size	.032 X .187

Dimension Information

Stock Thickness	0.016
L Inches (mm)	0.457
B Inches (mm)	0.217
F Inches (mm)	0.244
W Inches (mm)	0.197

Specifications

Temperature Rating	150°C
Voltage Rating	300 V
Flammability Rating	N/A
Amp Rating	14 AWG 15 Amps 16 AWG 10 Amps

Packaging




Bag Qty	100
Master Bag Qty	1000

Certifications

UL	Yes
cUL	Yes
RoHS	Yes

Morris Products 53 Carey Road, Queensbury, NY 12804

www.morrisproducts.com

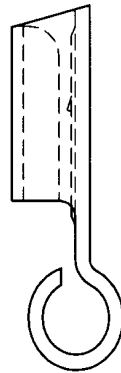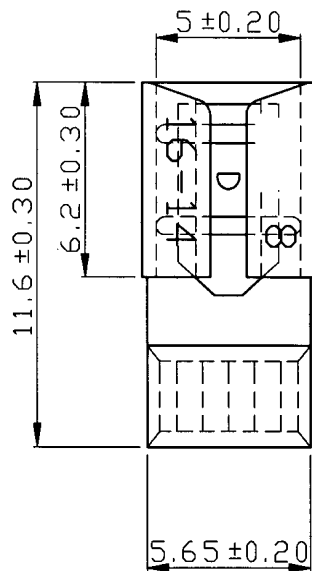


NOTE :

1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	16	14
AMP.	10	15
2. WIRE RANGE : 16-14 A.W.G. (1.5-2.5 mm²)
3. NEMA TAB : 0.032 inch * 0.187 inch (0.8 mm * 4.75 mm)
4. SURFACE TREATMENT : TIN PLATED
5. THICKNESS : 0.4 mm

Tolerance Unless Otherwise Specified		
0 > 6 mm ± 0.20	ANGLE	
6 > 18 mm ± 0.30	0° >	° REF ±
18 > 30 mm ± 0.40	° >	° ±
30 > 75 mm ± 0.50	° >	° ±

NAME	NON-INSULATED FLAG FEMALE DISCONNECTORS(NORMAL TYPE)				UNIT	mm	
PART NO.	12422	MATERIAL	BRASS		APPROVE		
NUMBER		SCALE	SHEET	PAGE	CHECKED		
DATE	2007/04/11	4/1	1-0	10F2	DRAWN		

Morris Products Inc.