MORRIS CAT#: 12436B
Nylon Fully Insulated Flag Female Disconnects - 22-16 Wire, .032x.250 Tab Bulk Bag



Features:

Nylon Fully Insulated Right Angle Flag Female Disconnects - 22-16 Wire, .032x.250 Tab features include:

- Manufactured from High Strength Brass
- Electro-Tin Plated for corrosion resistance
- Color Coded insulation for easy identification
- Easy Entry Expanded Nylon Insulation eliminates strand “Hang Up”, increasing crimping rates and provides mechanical strain relief
- Maximum Electric Current: 22 AWG - 3 Amp, 20 AWG - 4 Amp, 18 AWG - 7 Amp, 16 AWG - 10 Amp, 14 AWG - 15 Amp, 12 AWG - 20 Amp, 10 AWG - 24 Amp
- 221°F(105°C) 300 Volts Max
- cULus Listed
- Dimension Measurements = Inches
- Order Qty of 1000 = 1 Bag of 1000

MAXIMUM ELECTRIC CURRENT:

AWG	22	20	18	16	14
AMP	3	4	7	10	15

MAXIMUM ELECTRIC RATING: 221°F (105°C) 600 Volts
INSULATION MATERIAL: Nylon
TERMINAL MATERIAL: Electro-Tin Plated Brass
FEATURES: Serrated Barrel, Expanded Insulation

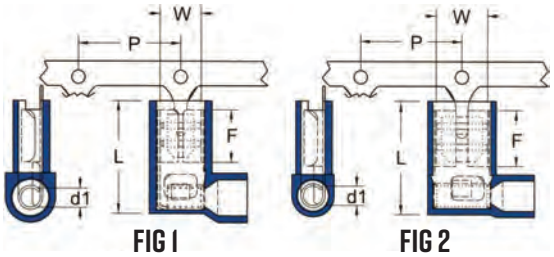


FIG 1 FIG 2




FIG 3

DIMENSIONS = INCHES

CAT. NO.	COLOR	WIRE SIZE AWG	NEMA TAB	W	F	L	DI	D	FIG.	BAG QTY	MASTER BAG QTY
12436B	RED	22-16	.032 X.250	.260	.299	.598	.063	-	1	1,000	10,000