
# MORRIS CAT#: 12756
# Nylon Insulated Ferrules - Din Standard - 10 Awg .709" Pin Length Yellow



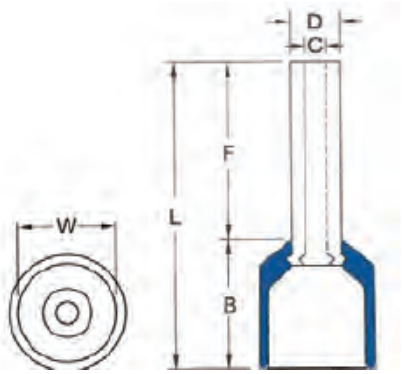


**Features:**

Nylon Insulated Ferrules 10 Awg .709" Pin Length features include:

- Ensures Gas Tight Termination in IEC Style Din Rail Mounted Terminal Blocks and other Terminations
- Manufactured from High Strength Electrolytic Seamless Tubular Copper
- Electro-Tin Plated for corrosion resistance
- Flared Barrel for Ease of Wire Insertion
- Available in Multiple Pin Lengths to accomodate a variety of Terminal Blocks Styles
- 221°F (105°C)
- 600 Volts Max
- Max Current: 22 AWG - 9 Amp, 20 AWG - 12 Amp, 18 AWG - 17 Amp, 16 AWG - 18 Amp, 14 AWG - 30 Amp, 12 AWG - 35 Amp, 10 AWG - 50 Amp
- UL Recognized
- Dimension Measurements = Inches
- Order Qty of 100 = 1 Bag of 100

**MAXIMUM ELECTRIC CURRENT:**

| AWG | 22 | 20 | 18 | 16 | 14 | 12 | 10 |
|---|---|---|---|---|---|---|---|
| AMP | 9 | 12 | 17 | 18 | 30 | 35 | 50 |

**TERMINAL MATERIAL:**
Electro-Tin Plated Tubular Copper
**INSULATION MATERIAL:** Nylon Insulation
**FEATURES:** Flared Barrel, Expanded Insulation
**MAXIMUM ELECTRIC RATING:** 221°F (105°C) 600V
**COLOR CODE:** DIN Standard

DIMENSIONS = INCHES

| CAT. NO. | WIRE SIZE AWG | COLOR | F | B | L | W | D | C | BAG QTY | MASTER BAG QTY |
|---|---|---|---|---|---|---|---|---|---|---|
| 12756 | 10 | YELLOW | .709 | .248 | 1.024 | .248 | .154 | .138 | 100 | 1,000 |