




**MORRIS CAT#: 12780-12792**  
**Nylon Twin Insulated Ferrules 2 Wire - Din**  
**Standard**

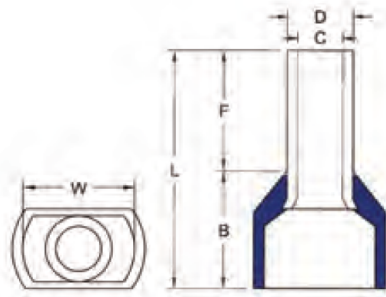

**TERMINAL MATERIAL:**  
 Electro-Tin Plated Tubular Copper  
**INSULATION MATERIAL:** Nylon Insulation  
**FEATURES:** 2 Wire Flared Barrel, Expanded Insulation  
**MAXIMUM ELECTRIC RATING:** 221°F (105°C) 600V  
**COLOR CODE:** DIN Standard

**Features:**

Nylon Twin Insulated Ferrules 2 Wire - Din Standard features include:

- Ensures Gas Tight Termination in IEC Style Din Rail Mounted Terminal Blocks
- Manufactured from High Strength Electrolytic Seamless Tubular Copper
- Electro-Tin Plated for corrosion resistance
- Funneled Entry for Ease of Wire Insertion
- Dual Wire Entry Design facilitates termination of 2 Conductors to a single point according to DIN Standards
- Available in Multiple Pin Lengths to accommodate a variety of Terminal Blocks Styles
- 221°F (105°C)
- 600 Volts Max
- Max Current: 22 AWG - 9 Amp, 20 AWG - 12 Amp, 18 AWG - 17 Amp, 16 AWG - 18 Amp, 14 AWG - 30 Amp, 12 AWG - 35 Amp, 10 AWG - 50 Amp
- UL Recognized
- Dimension Measurements = Inches
- Order Qty of 100 = 1 Bag of 100

**MAXIMUM ELECTRIC CURRENT:**

AWG	22	20	18	16	14	12	10
AMP	9	12	17	18	30	35	50

DIMENSIONS = INCHES

CAT. NO.	WIRE SIZE AWG	COLOR	F	B	L	W	D	C	BAG QTY	MASTER BAG QTY
12780	22	WHITE	.315	.256	.517	.197	.071	.059	100	1,000
12781	20	GREY	.315	.264	.579	.217	.083	.071	100	1,000
12782	20	GREY	.394	.264	.657	.217	.083	.071	100	1,000
12783	18	RED	.315	.280	.594	.217	.094	.083	100	1,000
12784	18	RED	.394	.280	.673	.217	.094	.083	100	1,000
12785	16	BLACK	.315	.295	.610	.252	.102	.091	100	1,000
12786	16	BLACK	.472	.295	.788	.252	.102	.091	100	1,000
12787	14	BLUE	.394	.235	.728	.315	.130	.114	100	1,000
12788	14	BLUE	.512	.235	.846	.315	.130	.114	100	1,000
12789	12	GREY	.472	.437	.909	.346	.165	.150	100	1,000
12790	10	YELLOW	.551	.476	1.028	.374	.209	.193	100	1,000
12791	8	RED	.551	.496	1.047	.496	.272	.256	100	1,000
12792	6	BLUE	.551	.681	1.232	.748	.343	.327	100	1,000