




Morris CAT#: 14910-14919
EMT Compression Connectors -
Zinc Die Cast

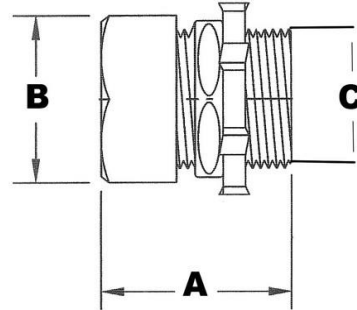

Features:

- To secure and terminate EMT to knockouts in concrete tight box, dry or damp location applications
- Male NPSM hub threads
- Concrete Tight
- UL Listed for EMT Conduit
- 2-1/2" - 4" are also UL Listed for use with Rigid & IMC

DIMENSIONS = INCHES

| CAT. NO. | TRADE SIZE | DIMENSIONS | | | INNER BOX | OUTER BOX |
|----------|------------|------------|------|------|-----------|-----------|
| | | A | B | C | | |
| 14910 | 1/2" | 1.24 | .98 | .59 | 50 | 500 |
| 14911 | 3/4" | 1.26 | 1.22 | .78 | 25 | 250 |
| 14912 | 1" | 1.46 | 1.46 | 1.00 | 15 | 150 |
| 14913 | 1-1/4" | 1.83 | 1.85 | 1.32 | 10 | 100 |
| 14914 | 1-1/2" | 1.85 | 2.07 | 1.53 | 10 | 40 |
| 14915 | 2" | 2.01 | 2.54 | 1.99 | 5 | 20 |
| 14916 | 2-1/2" | 2.54 | 3.37 | 2.35 | - | 12 |
| 14917 | 3" | 2.54 | 3.94 | 2.95 | - | 12 |
| 14918 | 3-1/2" | 2.60 | 4.45 | 3.43 | - | 6 |
| 14919 | 4" | 2.60 | 1.94 | 3.91 | - | 6 |