




Morris CAT#: 14920-14929
EMT Compression Connectors -
Insulated Throat -
Zinc Die Cast

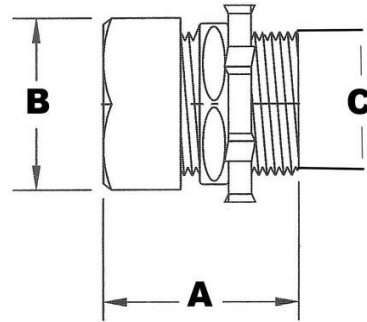

Features:

- To secure and terminate EMT to knockouts in concrete tight box, dry or damp location application
- Male NPSM hub threads
- Concrete Tight
- UL Listed for EMT Conduit
- 2-1/2" - 4" are also UL Listed for use with Rigid & IMC

DIMENSIONS = INCHES

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
14920	1/2"	1.28	.98	.59	50	500
14921	3/4"	1.32	1.22	.78	25	250
14922	1"	1.52	1.46	1.00	15	150
14923	1-1/4"	1.89	1.85	1.32	10	100
14924	1-1/2"	1.91	2.07	1.53	10	40
14925	2"	2.09	2.54	1.99	5	20
14926	2-1/2"	2.62	3.37	2.35	-	12
14927	3"	2.62	3.94	2.95	-	12
14928	3-1/2"	2.68	4.45	3.43	-	6
14929	4"	2.68	4.94	3.91	-	6