



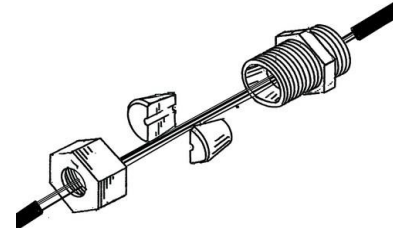

Morris CAT#: 15390-15399 Kenny Clamps



Features:

- UL 467 listed connector for use with Equipment Ground Conductors, Ground Electrode Conductors and Bonding Jumpers
- The Kenny Clamp bonds the enclosure of a service panelboard, load center, separately derived system or switchboard to the grounding electrode conductor per the requirements of NEC 250.8; 312.5(A); 250.53 (D)(2); 250.52 (A)(1); 250.52(A)(3); 250.66; 250.104 (D)(1); 250.24; 450.10(A)
- Assures good metallic connection and low impedance path for grounding and bonding of electrical equipment
- 12,000 Amp listed and tested
- Brass

DIMENSIONS = INCHES

CAT. NO.	MODEL NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
			A	B		
15390	KC8ST	8 AWG STRANDED	1.75	1.06	10	100
15391	KC8SO	8 AWG SOLID	1.75	1.06	10	100
15392	KC6SO	6 AWG SOLID	1.75	1.06	10	100
15393	KC6ST	6 AWG STRANDED	1.75	1.06	10	100
15394	KC4SO	4 AWG SOLID	1.75	1.06	10	100
15395	KC4ST	4 AWG STRANDED	1.75	1.06	10	100
15396	KC2ST	2 AWG STRANDED	1.75	1.06	10	100
15397	KCIAST	1/0 STRANDED	1.75	1.06	10	100
15398	KC2AST	2/0 STRANDED	1.75	1.06	10	100
15399	KC3AST	3/0 STRANDED	1.75	1.06	10	100