
| | |
|---|---|
| **Catalog Number** | See Table |
| **UPC Number** | |
| **Description** | Cable Tie - Natural<br>50 Lb Tensile Strength |



## Features

- Durable Nylon 6/6 Material
- Low Profile Locking Head
- Bent Tip for ease of insertion into locking head

## General

| | |
|---|---|
| Material: | Nylon 6/6 |
| Flammability: | UL94V-2 |

## Dimension Information

| | |
|---|---|
| Length: | See Table |
| Width: | See Table |
| Bundle Dia: | See Table |

## Specifications

| | |
|---|---|
| Temperature Rating | Negative 40 to $185^{0}$ F |
| Voltage Rating | 600 |
| Flammability Rating | UL 94V-2 |
| Tensile Strength: | 50 Lbs |

## Packaging

| | |
|---|---|
| Bag Qty | 100 |

## Certifications

| | |
|---|---|
| UL | Yes |
| CSA | Yes |
| ROHS | Yes |


| Cat. No. | Tensil Strength (Lbs.) | Length (Inches) | Width (Inches) | Max Bundle Dia (Inches) | Bag Qty | Master Bag Qty | Per 100 |
|---|---|---|---|---|---|---|---|
| 20052 | 50 | 7 | 0.156 | 1.93 | 100 | 1000 | |
| 20054 | 50 | 8 | 0.179 | 2.17 | 100 | 1000 | |
| 20056 | 50 | 11 | 0.187 | 3.19 | 100 | 1000 | |
| 20058 | 50 | 14 1/2 | 0.187 | 4.02 | 100 | 1000 | |
| 20060 | 50 | 17 | 0.187 | 4.92 | 100 | 100 | |

E97527

14515-99 HH

E-4988

06/10038

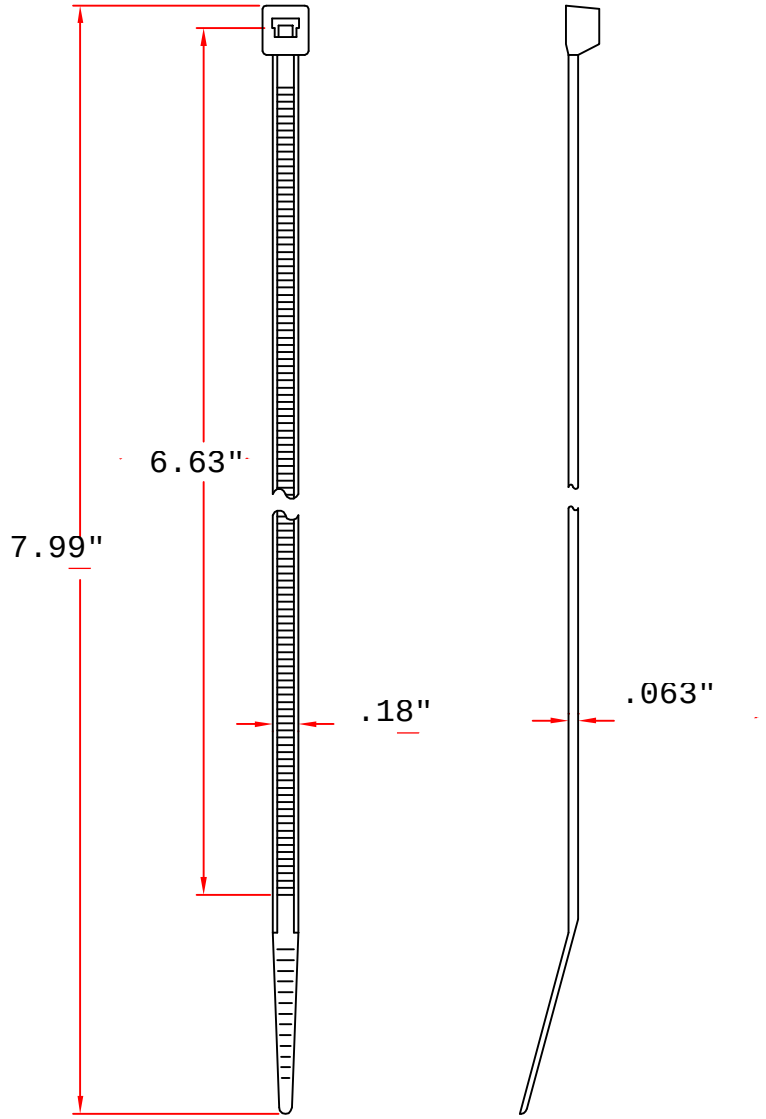


| | | | |
|---|---|---|---|
| Morris Products<br>Queensbury NY | MATERIAL UL 94V-2<br>NYLON 66 | ITEM NO. | 20054 |
| SCALE | 50 LBS<br>Tensile | NAME | NYLON CABLE TIE |
| | | 03-20-2007 DATE | REVISIONS K001 R.NO. |