



Catalog Number See Table
UPC Number
Description Cable Tie - UV Black
 40 Lb Tensile Strength



Features

- Durable Nylon 6/6 Material
- Low Profile Locking Head
- Bent Tip for ease of insertion into locking head

General

Material: Nylon 6/6
Flammability: UL94V-2

Dimension Information

Length: See Table
Width: See Table
Bundle Dia: See Table

Specifications

Temperature Rating Negative 40 to 185⁰ F
Voltage Rating 600
Flammability Rating UL 94V-2
Tensile Strength: 40 Lbs
UV Rating: UV Resistant Carbonate A additive

Packaging

Bag Qty 100

Certifications


UL Yes
CSA Yes
ROHS Yes

Cat No.	Tensil Strength (Lbs.)	Length (Inches)	Width (Inches)	Max Bundle Dia (Inches)	Bag Qty	Master Bag Qty	Per 100
20232	40	4 3/4	0.125	1.18	100	1000	
20234	40	6	0.14	1.54	100	1000	
20236	40	8	0.125	2.17	100	1000	
20238	40	10	0.14	2.91	100	1000	
20240	40	11 1/2	0.14	3.35	100	1000	

UL
E97527



14515-99 HH



DNV

E-4988

Lloyd's Register

00120055



40022513



1 • 2 • 3 • 4 •

A



B

C

D

E

F

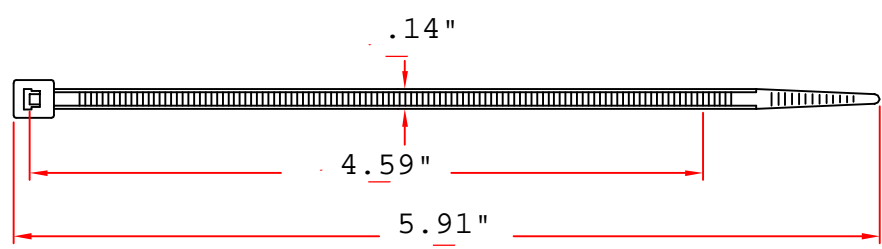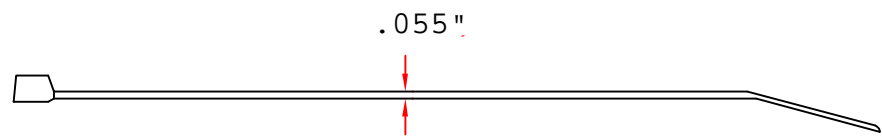

Morris Products Queensbury NY		MATERIAL-UL 94V-2 NYLON 66	ITEM NO. 20234
SCALE		40 LBS Tensile	NAME NYLON CABLE TIE
△	(. . .)	UV Resistant Black	△ 05-12-2009 DATE REVISIONS K002
			R.NO.