



**Catalog Number** See Table  
**UPC Number**  
**Description** Cable Tie - UV Black  
 40 Lb Tensile Strength



**Features**

- Durable Nylon 6/6 Material
- Low Profile Locking Head
- Bent Tip for ease of insertion into locking head

**General**

**Material:** Nylon 6/6  
**Flammability:** UL94V-2

**Dimension Information**

**Length:** See Table  
**Width:** See Table  
**Bundle Dia:** See Table

**Specifications**

**Temperature Rating** Negative 40 to 185<sup>0</sup> F  
**Voltage Rating** 600  
**Flammability Rating** UL 94V-2  
**Tensile Strength:** 40 Lbs  
**UV Rating:** UV Resistant Carbonate A additive

**Packaging**

**Bag Qty** 100

**Certifications**

**UL** Yes  
**CSA** Yes  
**ROHS** Yes

Cat No.	Tensil Strength (Lbs.)	Length (Inches)	Width (Inches)	Max Bundle Dia (Inches)	Bag Qty	Master Bag Qty	Per 100
20232	40	4 3/4	0.125	1.18	100	1000	
20234	40	6	0.14	1.54	100	1000	
20236	40	8	0.125	2.17	100	1000	
20238	40	10	0.14	2.91	100	1000	
20240	40	11 1/2	0.14	3.35	100	1000	

**UL**  
E97527



14515-99 HH



DAV

E-10035

**Lloyd's Register**

06/10038




40022513



**ABS**

10-TM537024

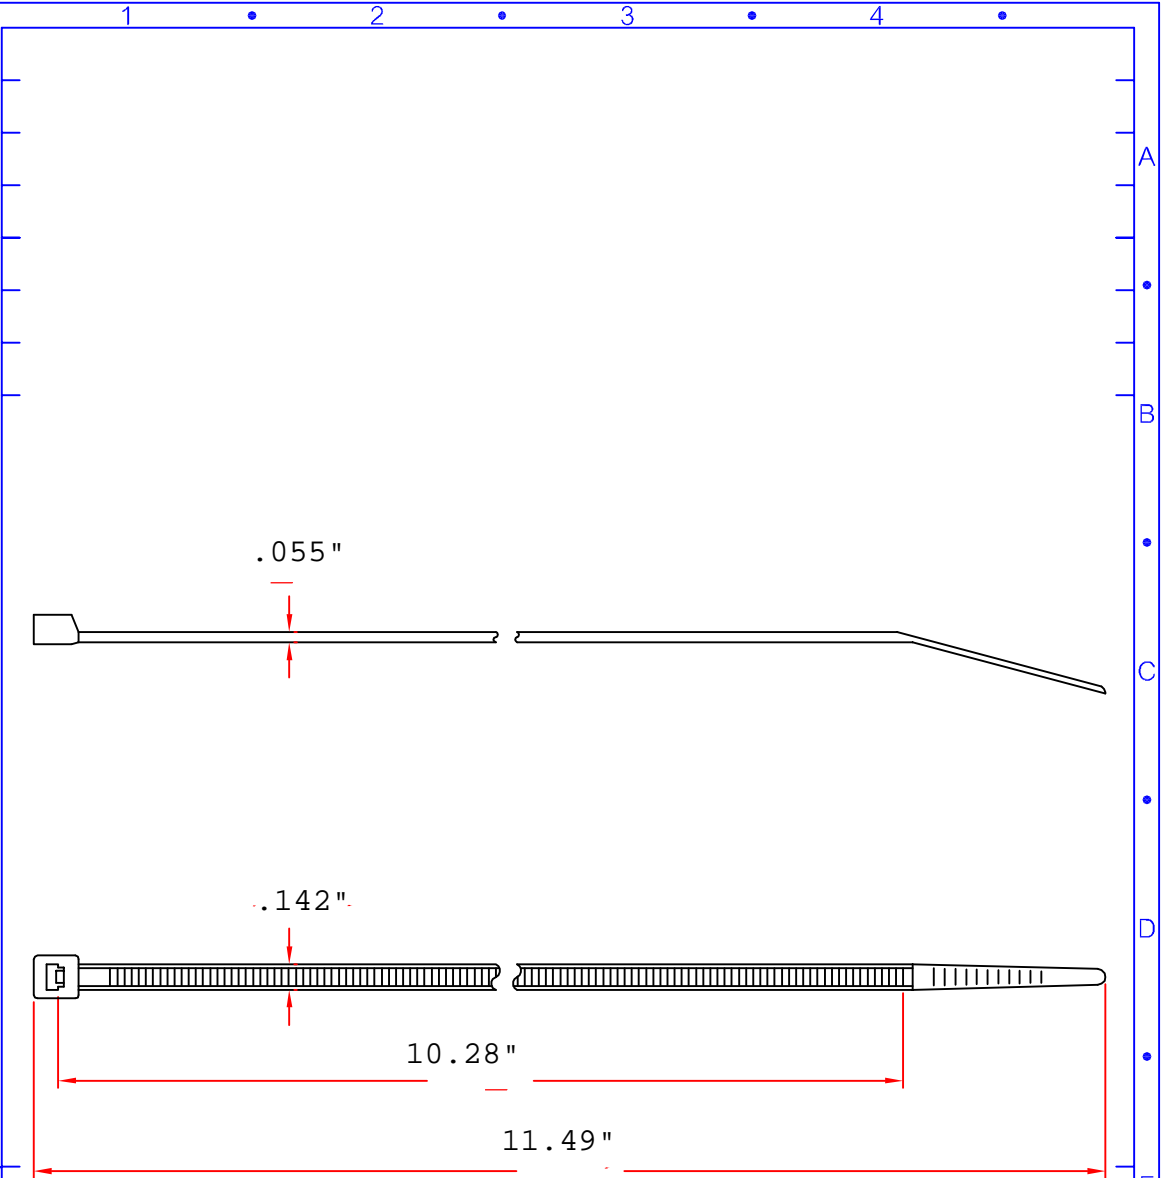

Morris Products  
Queensbury NY

MATERIAL UL 94V-2  
NYLON 66

ITEM NO. 20240

SCALE

40 LBS  
TENSILE

NAME

NYLON CABLE TIE



(. .)

UV Resistant  
Black



03-22-2007  
DATE

REVISIONS K001

R.NO.