



Catalog Number See Table
UPC Number
Description Mounting Cable Tie
 UV Black



Features

- Durable Nylon 6/6 Material
- Low Profile Locking Head
- Bent Tip for ease of insertion into locking head
- Mounting Tab for mechanical mounting

General

Material: Nylon 6/6
Flammability: UL94V-2
UV Rating: UV Black Carbonate A additive

Dimension Information

Length: See Table
Width: See Table
Bundle Dia: See Table

Specifications

Temperature Rating Negative 40 to 185⁰ F
Voltage Rating 600
Flammability Rating UL 94V-2
Tensile Strength: Various

Packaging

Bag Qty 100

Certifications






UL Yes
CSA Yes
ROHS Yes

Cat No.	Tensil Strength (Lbs.)	Length (Inches)	Width (Inches)	Max Bundle Dia (In)	Bag Qty	Master Bag Qty	Per 100
ULTRAVIOLET BLACK							
20332	25	3 7/8	0.098	0.98	100	1000	
20334	40	6	0.144	1.54	100	1000	
20336	50	8	0.164	2.17	100	1000	
20337	50	11 7/8	0.1889	3.35	100	1000	
20338	50	14 7/16	0.187	4.02	100	100	
20340	120	15 5/8	0.308	4.8	100	100	

C **UL** **US**
E97527



14515-99 HH

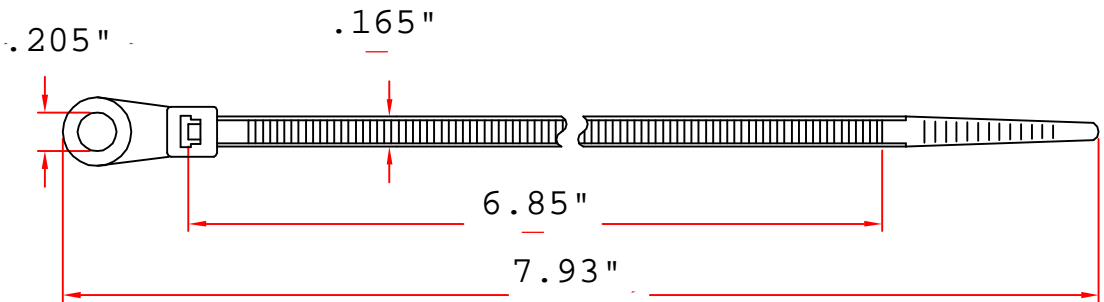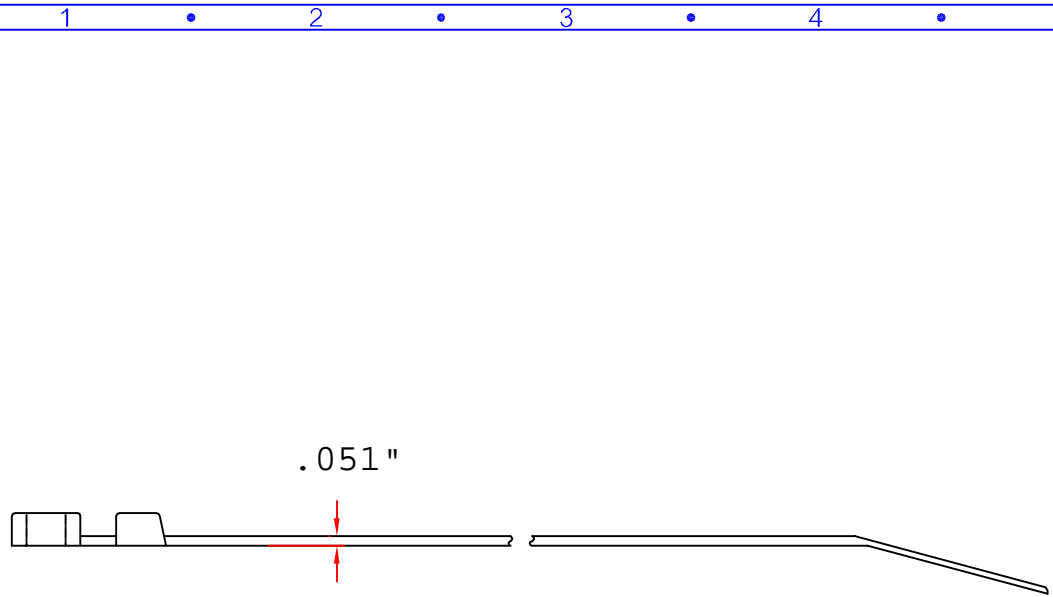

		MATERIAL: UL 94V-2	ITEM NO.
		NYLON 66	20336
SCALE		UV Black	NAME
			MOUNTING CABLE TIE
△	(. .)	Morris Products	(. .)
		Queensbury NY	08-31-2009
			DATE
			REVISIONS
			K003
			R.NO.