


## Terminal Strips - 30A

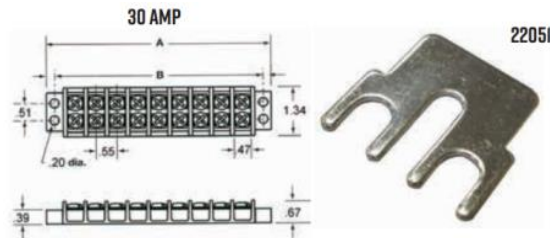

### Features:

- Nylon insulated terminal strips are popular to alternative splicing
- High density circuitry can be attained to conserve space
- Rated: 30A UL 300VAC CSA 600VAC
- .55" Center Spacing
- Nylon Insulation Withstands Voltage: AC 2000V/min
- Insulation Resistance: 1000M or More at DC500V
- Using Temperature Range: -40°F to 248°F (-40°C to 120°C)
- Screw Torque Value: 18 Kg-cm
- 30 Amps –18-12 AWG
- Insulator Body: Plastic Nylon 66 (UL 94V-0)
- Brass Tin Plated Terminals 0.8t
- Terminal Screws: M4 Nickel Plated Brass

## Terminal Strips - 30A

DIMENSIONS = INCHES

CAT NO.	POLES	A	B	BAG QTY
<b>HEADER CARD - 2 PACK</b>				
22122	2	2.05"	1.65"	2
22123	3	2.60"	2.20"	2
22124	4	3.15"	2.76"	2
22126	6	4.25"	3.86"	2
22128	8	5.35"	4.96"	2
22130	10	6.46"	6.06"	2
22132	12	7.56"	7.17"	2
<b>BAG - 10 PACK</b>				
22022	2	2.05"	1.65"	10
22023	3	2.60"	2.20"	10
22024	4	3.15"	2.76"	10
22026	6	4.25"	3.86"	10
22028	8	5.35"	4.96"	10
22030	10	6.46"	6.06"	10
22032	12	7.56"	7.17"	10
<b>JUMPER BAR</b>				
22051	JUMPER BAR			10