



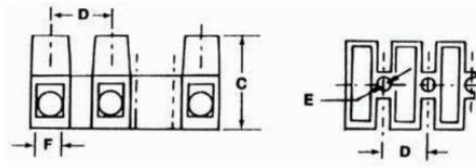

MORRIS CAT#: 22058-22152

Terminal Blocks

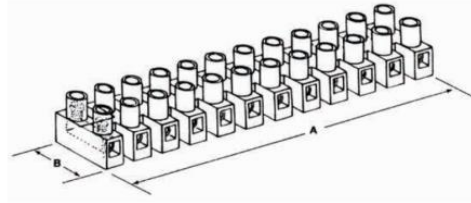

Features:

- Touch Proof Recessed Screws and Tubular Contacts provide added safety and helps prevent short circuits
- Tubular Contacts connect stripped, un-terminated solid or stranded wire directly to each contact
- Integrated Stainless Steel Spring Wire Protectors prevent twisting and breakage of stranded wire during termination
- Modular 12-Circuit Design can be cut into smaller sections, or stacked end-to-end
- Dead Front Design to prevent shorts
- Rugged Nylon 66 Housing, UL 94V2
- Brass Metal Alloy, Nickel Plated Terminal Insert
- Zinc Plated, yellow chromated screws
- Can be used for AC & DC Applications
- 300V
- 221°F (105°C)

DIMENSIONS = INCHES

| CAT NO. | AMP | VOLTS | WIRE RANGE | A | B | C | D | E | F | STRIP LENGTH | BAG QTY |
|-----------------------------|-----|-------|------------------------|------|-------|------|------|------|------|--------------|---------|
| HEADER CARD - 2 PACK | | | | | | | | | | | |
| 22152 | 20 | 300 | 22-12 | 3.79 | .669 | .570 | .315 | .114 | .110 | .20 | 2 |
| 22154 | 30 | 300 | 22-10 SOL 22-12 STR | 4.62 | .795 | .670 | .394 | .142 | .134 | .25 | 2 |
| 22156 | 30 | 300 | 22-10 | 5.54 | .937 | .748 | .472 | .154 | .154 | .27 | 2 |
| 22158 | 50 | 300 | 20-8 | 6.22 | 1.008 | .992 | .531 | .173 | .189 | .35 | 2 |
| BULK | | | | | | | | | | | |
| 22052 | 20 | 300 | 22-12 | 3.79 | .669 | .570 | .315 | .114 | .110 | .20 | 50 |
| 22054 | 30 | 300 | 22-10 SOL 22-12 STR | 4.62 | .795 | .670 | .394 | .142 | .134 | .25 | 50 |
| 22056 | 30 | 300 | 22-10 | 5.48 | .924 | .739 | .472 | .154 | .154 | .27 | 40 |
| 22058 | 50 | 300 | 20-8 | 6.22 | 1.008 | .992 | .531 | .173 | .189 | .35 | 25 |