



Catalog Number 39050
UPC Number 60198639050
Description Locking Photocell
120 Volt




Features

- Housing: UV stabilized impact resistant polycarbonate Cover
High Temp Polyester Base
Three Pole Twist Lock Connector with Solid Brass Blades
- Operating Temperature: -23°C to +75°C
Heavy-duty thermal bi-metal switch provides a 30+ second time delay
Contact Position at Night is Normally Closed
- Sensor Type: CDS
Single Pole, Single Throw Switch
Power Consumption Below .9 Watts Average
- Load Switching Capability: 5,000 operations
- Load Rated: 1000W/1800VA

General

Material: Polyester Base Polycarbonate Housing
Switching: Single Pole, Single Throw
Load Rating: 1000W 1800 VA Tungsten
Sensor Type: CDS

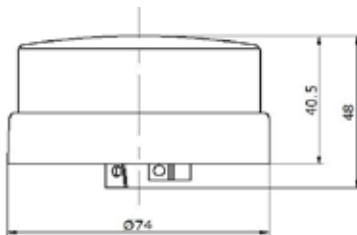

Dimension Information

Diameter: 3"
Height: 2"

Specifications

Temperature Rating: -40°F – +150°F
Voltage Rating: 120 V
Frequency: 50-60 Hertz
Turn-On Light Level: 10-16 Lux
Turn-Off Light Level: <65 Lux
Turn-On Time Delay: 30-180sec
Turn-Off Time Delay: 30-180sec

Packaging

Bag Qty 1
Master Bag Qty 1

Certifications

UL UL 773 Standard
cUL
RoHS

www.morrisproducts.com

Morris Products 53 Carey Road, Queensbury, NY 12804