



Catalog Number 39052  
UPC Number 60198639052  
Description Locking Photocell  
105 - 305 Volt




### Features

- Housing: UV stabilized impact resistant polycarbonate Cover  
High Temp Polyester Base  
Three Pole Twist Lock Connector with Solid Brass Blades
- Operating Temperature: -23°C to +75°C  
Heavy-duty thermal bi-metal switch provides a 30+ second time delay  
Contact Position at Night is Normally Closed
- Sensor Type: CDS  
Single Pole, Single Throw Switch  
Power Consumption Below .9 Watts Average
- Load Switching Capability: 5,000 operations
- Load Rated: 1000W/1800VA

### General

Material: Polyester Base Polycarbonate Housing  
Switching: Single Pole, Single Throw  
Load Rating: 1000W 1800 VA Tungsten  
Sensor Type: CDS

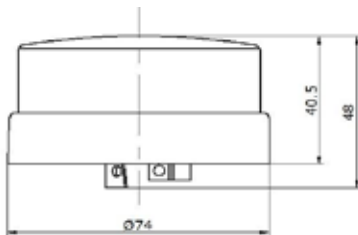

### Dimension Information

Diameter: 3"  
Height: 2"

### Specifications

Temperature Rating: -40°F – +150°F  
Voltage Rating: 105 - 305 V  
Frequency: 50-60 Hertz  
Turn-On Light Level: 10-16 Lux  
Turn-Off Light Level: <65 Lux  
Turn-On Time Delay: 30-180sec  
Turn-Off Time Delay: 30-180sec

### Packaging

Bag Qty 1  
Master Bag Qty 1

### Certifications

UL UL 773 Standard  
cUL  
RoHS

[www.morrisproducts.com](http://www.morrisproducts.com)

Morris Products 53 Carey Road, Queensbury, NY 12804