39100 - 39104 - LED PHOTOCELLS

FIG. 1

FIG. 2

FIG. 3

FIG. 4

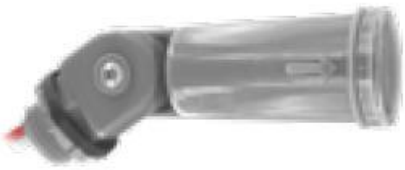

FEATURES:

- LED Compatible
- Silicon Light Sensor/IR Filtered
- Zero Cross/DC Relay for attenuation of In-Rush Current
- MCU Circuitry - Conformal Coated PCB
- MOV Surge Suppression
- 120-277VAC
- On/Off Lux: 16 Lx/24 Lx
- 1000 Tungsten Watts
- Ballast VA: 1200@120V 1800@208-277V
- Amps: 8A@120V 5A@208-277V
- 5 Second Time Delay
- Mounting: Wall or Fixture
- Polycarbonate Housing
- IP65 Outdoor Rated
- Operating Temp: -22° To 158°
- 1 Year Warranty
- UL Listed

CAT. NO.	FIG.	MOUNTING	VOLTS	ON/OFF LUX	TUNGSTEN RATING (W)	BALLAST RATING (VA)	AMPS	CASE QTY	EACH
					LED BUTTON STYLE				
39100	1	FIXTURE	120-277V	16 LX/24 LX	1000W	1,200 @ 120V 1,800 @ 208-277V	8A @ 120V 5A @ 208-277V	160	
39101	2	WALL PLATE	120-277V	16 LX/24 LX	1000W	1,200 @ 120V 1,800 @ 208-277V	8A @ 120V 5A @ 208-277V	100	
					LED SHUTTER STYLE				
39102	3	FIXED	120-277V	16 LX/24 LX	1000W	1,200 @ 120V 1,800 @ 208-277V	8A @ 120V 5A @ 208-277V	200	
39103	3	SWIVEL	120-277V	16 LX/24 LX	1000W	1,200 @ 120V 1,800 @ 208-277V	8A @ 120V 5A @ 208-277V	100	
					LED PENCIL STYLE				
39104	4	SWIVEL	120-277V	16 LX/24 LX	1000W	1,200 @ 120V 1,800@ 208-277V	8A @ 120V - 5A @ 208-277V	200	