



Catalog Number	70120
UPC Number	60198670120
Description	Toggle Switch SPST, ON-OFF 2 Pole

Features

- Heavy Duty
- Screw Terminals
- Solid brass/nickel-plated bushings
- 2 Copper Screw Terminals
- ½ in. Diameter mounting hole

General

Material:	Non-metallic Handle HD Non-Metallic Housing 2 Copper Screw Terminals
-----------	--

Dimension Information

See Engineering Dwg

Specifications

Temperature Rating:	0°C - 65°C
Voltage Rating:	125/277 VAC
Flammability Rating:	N/A
Amperage Rating:	20 AMP, 125VAC 10 AMP, 277VAC
InsulationResistance:	500V DC 100 mohm 1 Minute
Contact Resistant:	50 mohm Max
Dialectric Strength:	1500 V AC 1 Minute

Packaging



Bag Qty	10
---------	----


Certifications

UL	Yes
CSA	Yes
ROHS	





www.morrisproducts.com

Morris Products 53 Carey Road, Queensbury, NY 12804

Rating	20A 125 VAC, 10A 277 VAC	Mounting Hole	Circuit Diagram
Contact Resistance	50m ohm Max.		
Insulation Resistance	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1500V 1 minute		
Switch Function	2P SPST ON-OFF		

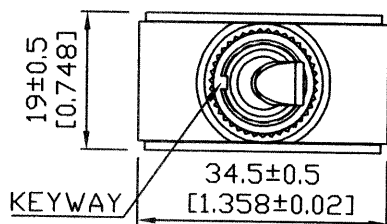

1 HEX NUT ASSY
1 BLACK KNURL NUT ASSY

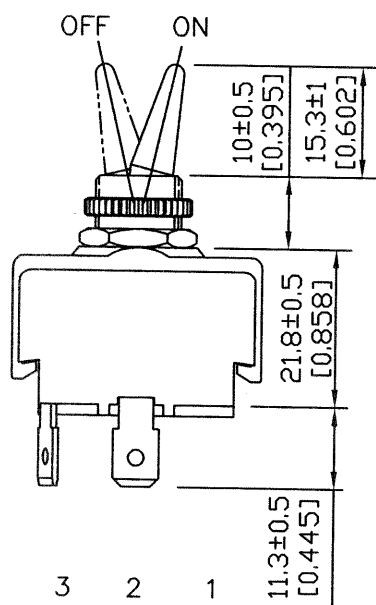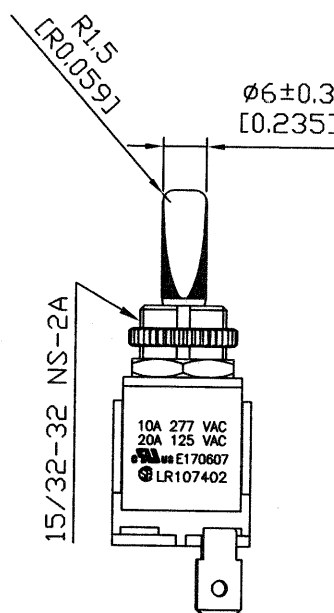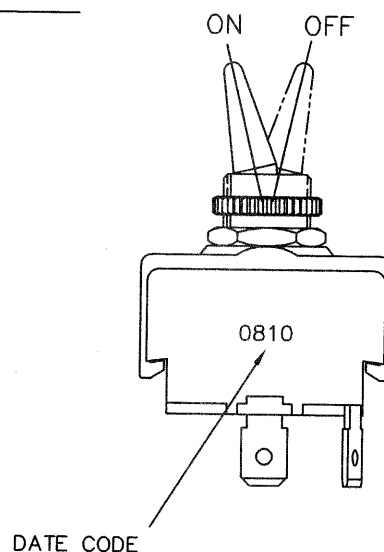

									△
									△
Date	Name	Descriptions							NO
Drawn	Checked	Approved		Morris Products	Model Name	TOGGLE SWITCH			
				Queensbury NY	Model No.				REV.
08/09/'10		08/09/'10	Morris P/N	70120					0