



Catalog Number	70150
UPC Number	60198670150
Description	Momentary Contact Push Button Switch SPST ON-(OFF)

Features

- Heavy Duty
- Momentary Contact
- Normally On
- Solid steel/nickel-plated bushings
- 2 Copper Screw Terminals
- ½ in. Diameter mounting hole

General

Material:	Non-metallic Actuator Button HD Non-Metallic Housing 2 Copper Screw Terminals
------------------	---

Dimension Information

See Engineering Dwg

Specifications

Temperature Rating:	0°C - 65°C
Voltage Rating:	125/240 VAC
Flammability Rating:	N/A
Amperage Rating:	3 AMP, 125VAC 1.5 AMP, 240VAC
InsulationResistance:	500V DC 100 mohm 1 Minute
Contact Resistant:	50 mohm Max
Dialectric Strength:	1500 V AC 1 Minute

Packaging


Bag Qty	10
---------	----

Certifications



UL	Yes
CSA	Yes
ROHS	

www.morrisproducts.com

Morris Products 53 Carey Road, Queensbury, NY 12804

Rating	3A 120V AC,1.5A 240V AC	Mounting Hole	Circuit Diagram
Contact Resistance	50m ohm Max.		
Insulation Resistance	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1500V 1 minute		
Switch Function	2P SPST ON-(OFF)		
BUTTON: RED			

(1 PCE/ZIPPER BAG+MORRIS LABEL,
10 PCS/POLY BAG + MORRIS LABEL,
500 PCS/CARTON)

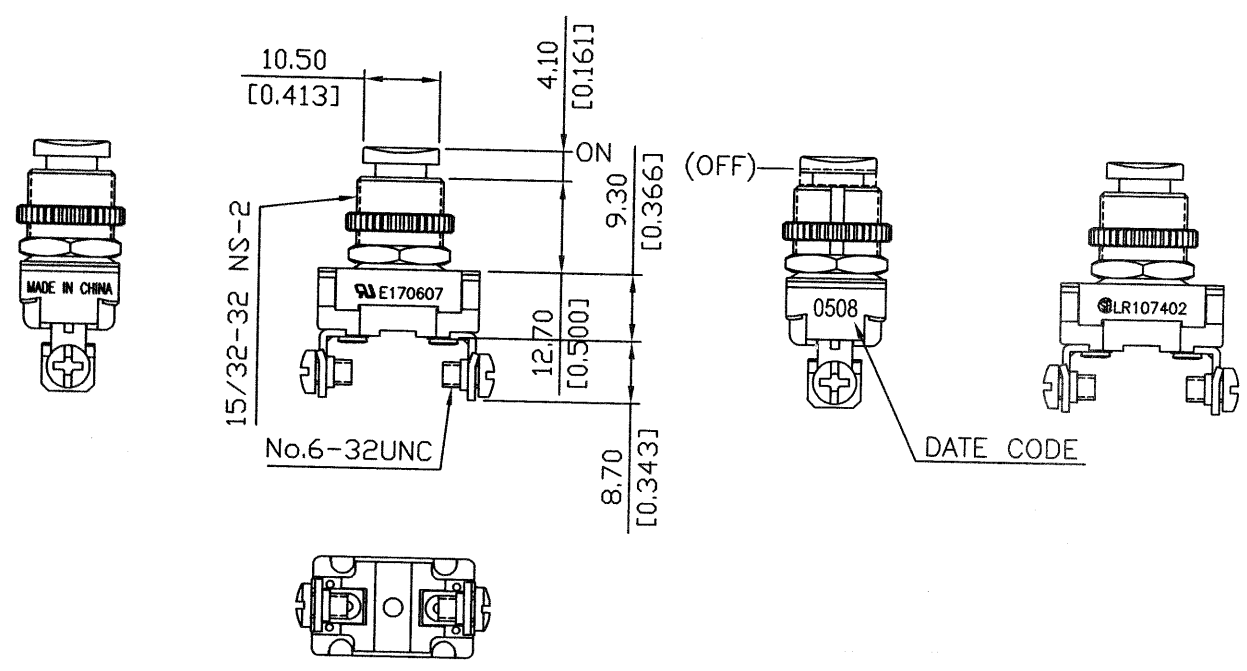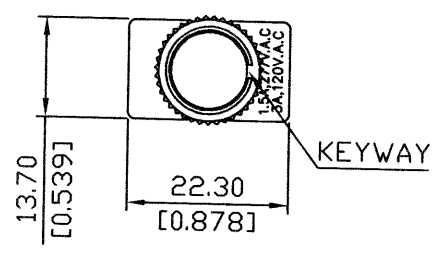

						△
						△
Date	Name	Description				REV. 0 NO
Drawn	Checked	Approved	Morris Products	Model Name	PUSH SWITCH	
			Queensbury NY	Model No.		
05/08/'08	05/08/'08	05/09/'08	Morris P/N 70150	Unit	mm (inch)	