MORRIS

Rating	20A 125VAC 10A 250VAC 16A 125VAC 3/4HP 10A 277VAC 3/4HP 21A 14VDC
Contact Resistance	50m ohm Max.
Insulation Resistance	DC 500V 100M ohm Min.
Dielectric Strength	AC 1500V 1 minute
Operation Temperature	-20°~+85°
Switch Function	6P DPDT (ON)-OFF-(ON)

Mounting Hole



Thickness(mm)	X(mm)	Y(mm)
0.75~1.25	21.2+0.1	$36.6^{+0.2}_{0}$
1.25~2.0		$36.8^{+0.2}_{0}$
2.0~3.0		$37.0^{+0.2}_{0}$

Circuit Diagram



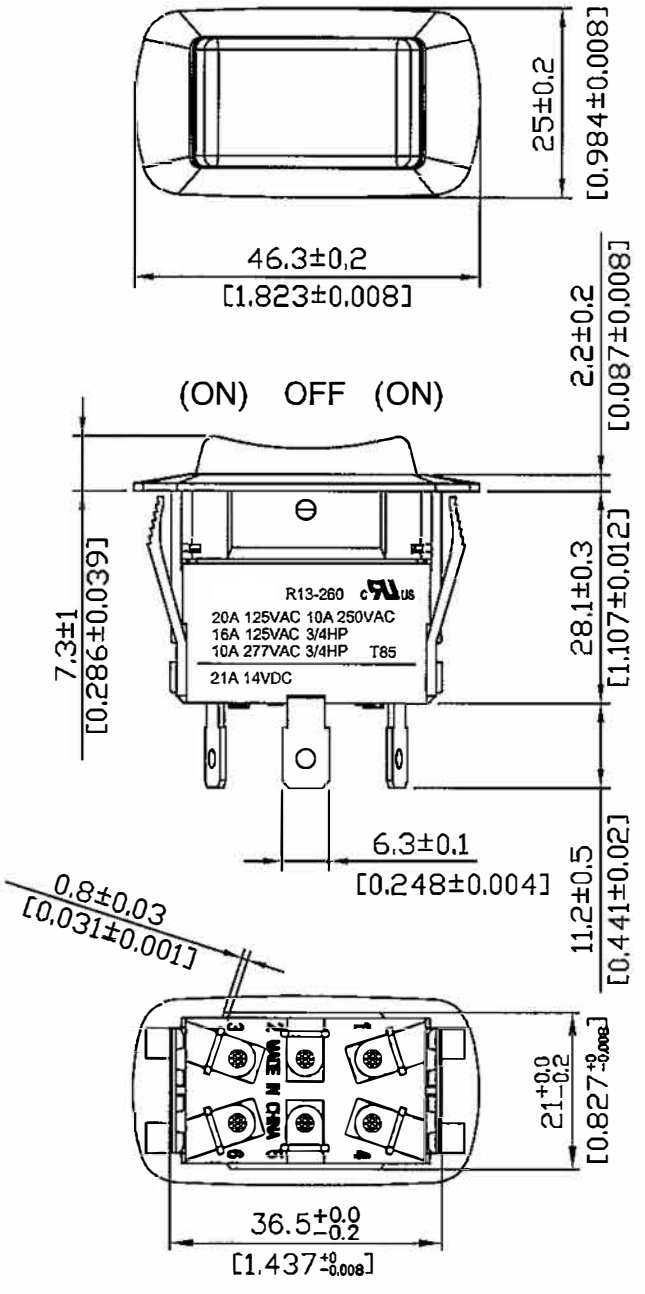

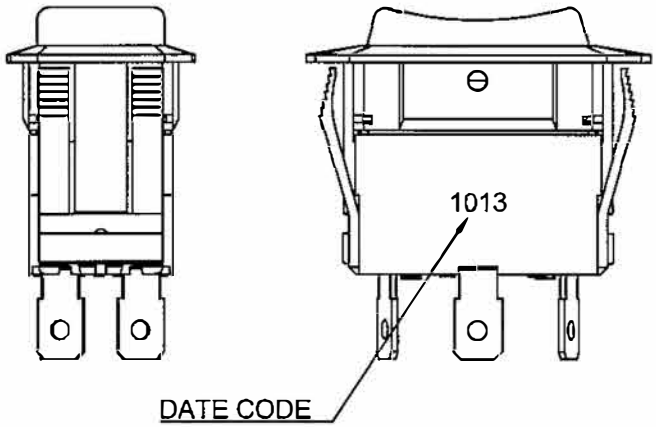

MATERIAL:
Frame: Nylon#66, Black
Actuator: Nylon#66 with 33%GF, Black
Printed: None
Dust proof and Water proof to fit IP-52

Morris pack
1 pcs/zipper bag + Morris label
10 pcs/poly bag, heat sealed + Morris label
50 pcs/inner box + box label
500 pcs/carton

for Morris only

			△
			△
Date	Name	Description	NO

Drawn	Checked	Approved			Model Name	TOGGLE SWITCH	
			Morris P/N	70175	Model No.		Rev.
10/07/13		10/7/13	Unit	mm(inch)			X0