



Catalog Number 70301-70306
UPC Number
Description Toggle Switch
 3 Pole, 4 Pole



Features

- Heavy Duty
- Screw Terminals
- Solid brass/nickel-plated bushings
- Copper Screw Terminals
- ½ in. Diameter mounting hole

General

Material: Nickel Plated Zinc
 HD Non-Metallic Housing
 Copper Screw Terminals

Dimension Information

See Table

Specifications

Temperature Rating: 0°C - 65°C
Voltage Rating: 125/277 VAC
Flammability Rating: N/A
Amperage Rating: 15 AMP, 125VAC
 10 AMP, 277VAC
Motor Load: 3/4 HP, 125/250VAC
Insulation Resistance: 500V DC 100 mohm 1 Minute
Contact Resistant: 50 mohm Max
Dielectric Strength: 1500 V AC 1 Minute


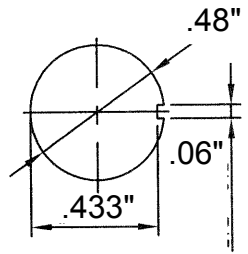
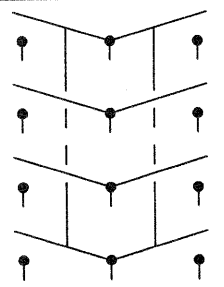
Packaging

Bag Qty 10


Certifications

UL Yes
CSA Yes
ROHS

Cat. No.	Poles	Circuitry	Number of Terminals	Amps 125 VAC	Amps 277VAC	HP 125-250 VAC	Dimensions L" x W" x H"	Bag Qty
70301	3PST	On-Off	6	15	10	¾	1.31x1.09x.80	10
70302	3PDT	On-On	9	15	10	¾	1.31x1.09x.80	10
70303	3PDT	On-Off-On	9	15	10	¾	1.31x1.09x.80	10
70304	4PST	On-Off	8	15	10	¾	1.31x1.44x.80	10
70305	4PDT	On-On	12	15	10	¾	1.31x1.44x.80	10
70306	4PDT	On-Off-On	12	15	10	¾	1.31x1.44x.80	10

Rating	16A 125VAC, 10A 250VAC 	Mounting Hole	Circuit Diagram
Contact Resistance	50m ohm Max.		
Insulation Resistance	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1500V 1 minute		
Switch Function	12P 4PDT ON-OFF-ON		

2 HEX NUT ASSY
1 SPRING WASHER ASSY

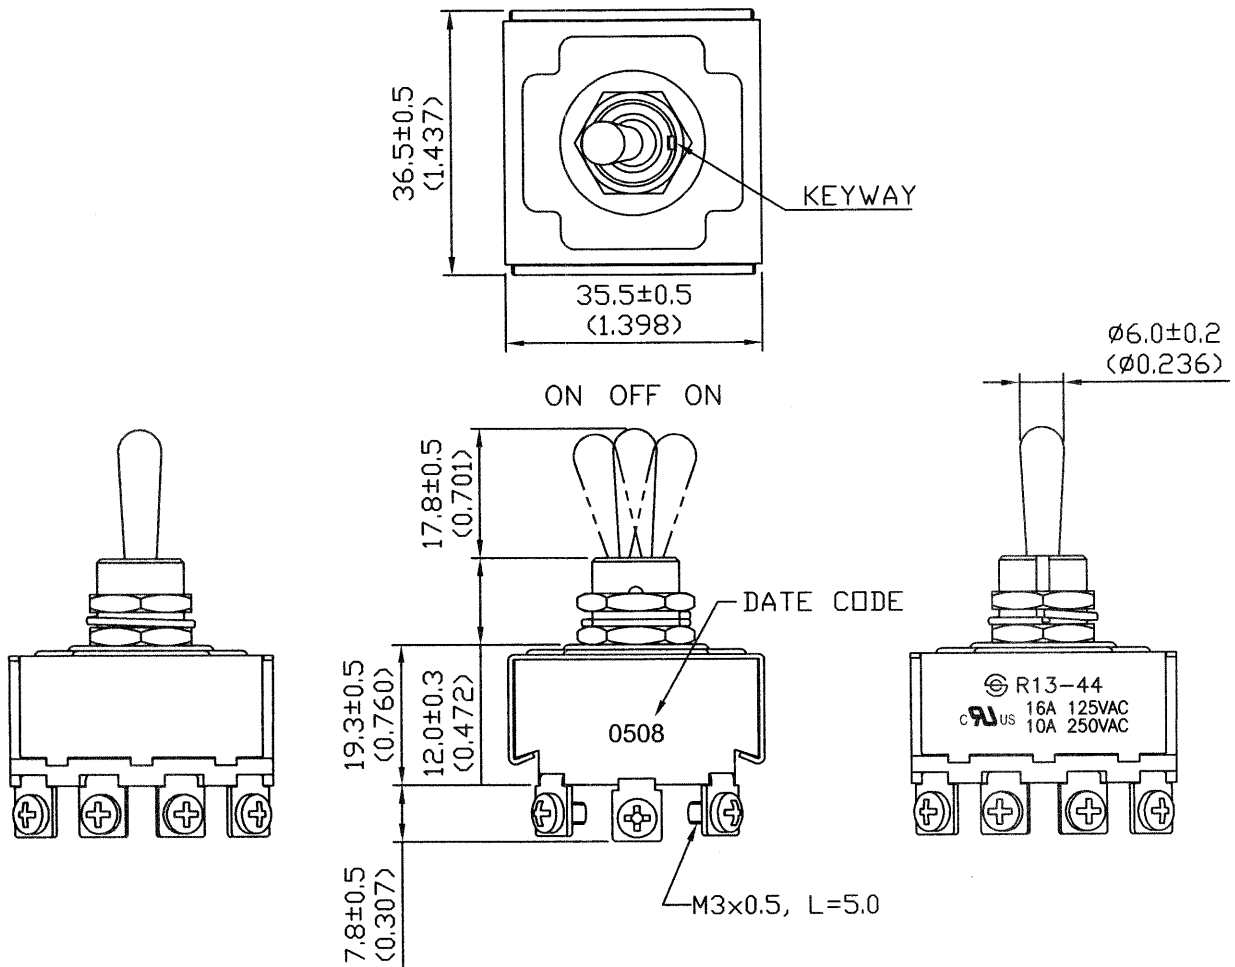

									△
									△
Date	Name	Description					REV.	0	NO
Drawn	Checked	Approved		Morris Products	Model Name	TOGGLE SWITCH			
				Queensbury NY	Model No.				
05/08/'08	05/08/'08	05/09/'08	Morris P/N	70306	Unit	mm	(inch)		