




70604B - GENERAL PURPOSE

RETROFIT LAMP




4K/5K 70W/100W 120-277V

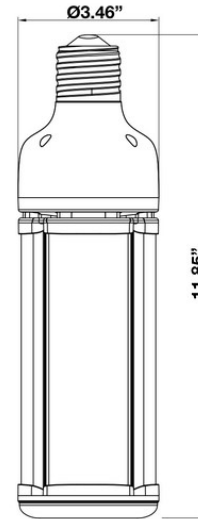

FEATURES:

- Color Selectable: 4000K/5000K
- Wattage Selectable: 70W/100W
- Retrofit for HPS & MH Lamps, E39 Base
- Polycarbonate Housing
- Polycarbonate Diffused Lens
- Operating Temperature: -40°F to 113°F
- IP64 Wet Location Rated
- DLC, UL Listed
- UL approved for enclosed fixtures
 - Min Lamp Compartment Dimensions:
60W-100W: 11.81" (L) x 11.81" (W)

Part#	Housing Color	Wattage Tunable	Lumens	CCT	Voltage	Light Pattern	BUG Rating	Lumens/Watt	DLC PRODUCT ID#:
70604B	White	70W/100W	11,235	4K/5K	120-277	255°	B3-U5-G3	112 lm/w	S-AP93OK

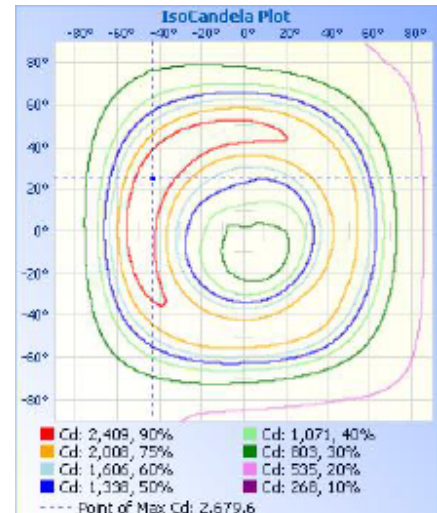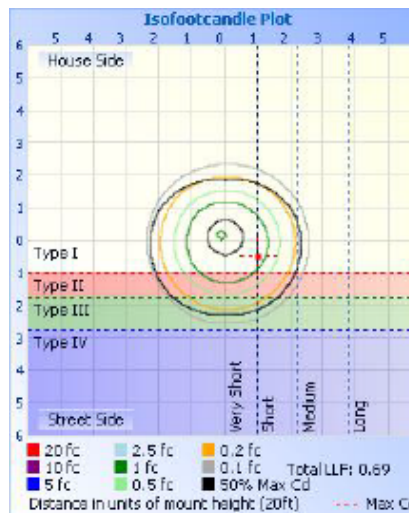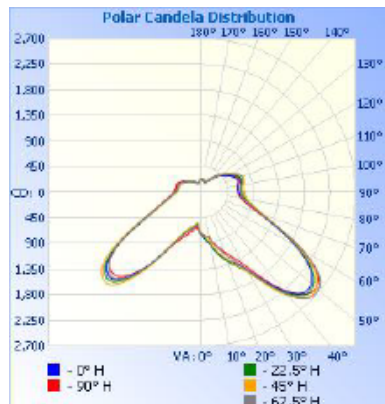

PHOTOMETRY



70604B - GENERAL PURPOSE RETROFIT LAMP

4K/5K 70W/100W 120-277V

Technical Specifications:

Electrical:

Input Voltage: 120 - 277

Current: .79A @ 120V

Frequency: 60Hz

Power Factor: $\geq .87$

THD: 23%

Product Parameters:

Wattage: 70W/100W

Efficacy: 112 lumens per watt

50,000+ LED Life Span

CCT: 4000K/5000K

Chromaticity Measurements:

Beam Angle: 255°

BUG Rating: B3-U5-G3

CRI: >80

R9: 8

Dimming:

1-10V Dimming

Operating Temperature:

Minimum Starting -40°F - 113°F

Construction:

Housing: Polycarbonate

IP Rating: IP64 Wet Location Rated

This device is suitable for enclosed fixtures. Minimum lamp compartment dimensions:

- 60W-100W: 11.81" (L) x 11.81" (W)

Lens Material: Polycarbonate

Mounting: E39 Screw In Base

Listings: DLC, UL Listed

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).