




Full Cutoff Driverless WallPack

50W, 120-277V, 5000K

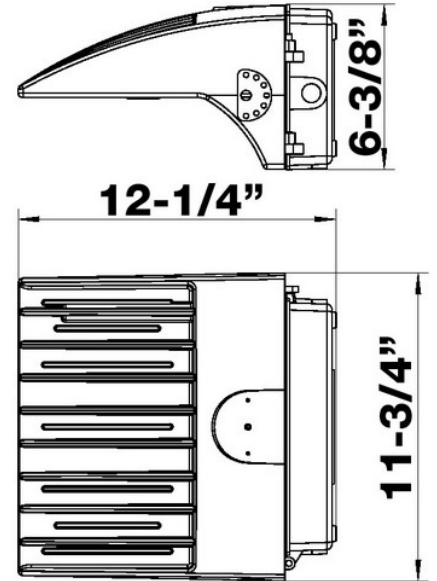


Features:

Driverless Design eliminates premature driver failure, significantly increases fixture life expectancy at high ambients.

- 5 year warranty at 55°C/131°F
- 2X fixture life expectancy compared to traditional LED fixtures
- Higher maximum ambient operating temperature range vs traditional LED fixtures
- 5050 LED package - superior lumen output and heat dissipation
- Universal Voltage 120V through 277V
- Superior Lumen (L70) and Color Maintenance over time compared to traditional LED fixtures
- Eliminates driver generated noise and harmonics - Eliminates maintenance costs
- 10KV Surge Suppression standard
- Bronze Diecast Aluminum Housing - Twist Lock Receptacle and Shorting Cap Included
- Heat Resistant Directed Optics - Polycarbonate
- Excellent Heat Dissipation - Maximum Life Expectancy

Cat#	Wattage	Volts	Lumens	CCT	CRI	Dimming	Lumens/ Watt	Light Distribution
71106	50	120-277	5700	5000K	70	0-10V/PWM/VR	114	H122° x V60°

Note: No 208V

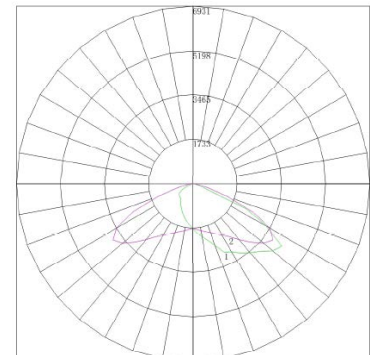



Full Cutoff Driverless WallPack

50W,120-277V, 5000K



Technical Specifications:

Electrical:

Input Voltage: 120-277V

Current: .422A@120V

Frequency:50/60Hz

Power Factor: .99

THD: 15%

Product Parameters:

Watts: 50

Lumens: 5700

Efficacy:121 Lumens/Watt

50,000+ Hour L70 Life Span

CCT: 5000K (Neutral White)

Chromaticity Measurements:

Beam Angle: NA

CRI: 70

R9: -14

DUV: -.00015

Chromaticity (x,y): x=.3742; y=.3697

Chromaticity (u,v): u=.2238; v=.3317

Component Specifications:

LED: Seoul 5050

Driver: 100-277V 50-60 Hz

Class 2

Driver Output Volts:

Driver Output Amps:

Surge Suppression: 10 KV

Dimming: 0-10V/PWM/VR

Operating Temperature:

Minimum Starting -40°F - 131°F

Construction:

Housing: ADC 12 Aluminum Alloy

Powder Coated

IP Rating: IP65 suitable for wet locations

Lens Material: Heat Resistant Polycarbonate

UV Resistant

Fire Resistant

Listings: UL Listed: E474299

EPA Rating: 0.25 ft²

Weight: 12 lb

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).