



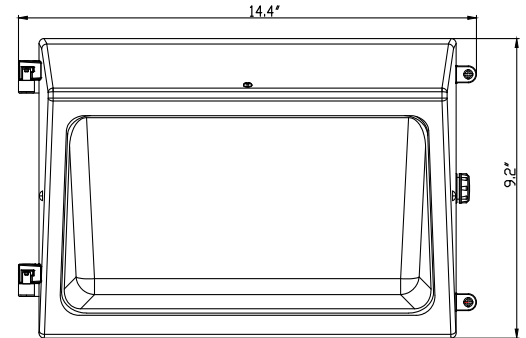

71429D - LED WHITE MEDIUM WALLPACK

120-277V 75W 5000K






Includes Built-In Photocell!!

FEATURES:

- Die Cast Aluminum Housing/ Stainless Hardware
- Polyester White Powder Coating
- Aluminum Heat Sink & Customized Fin Design for Optimal Heat Dissipation
- Heat Resistant Optics
- Borosilicate Glass Lens
- 0-10V Dimmable
- Photocontrol included with on/off switch
- Operation Temperature: -40°F - 104°F
- Emergency Battery Backup (Sold Separately)
- Light Pattern: 99°
- Certifications: ETL/cETL, DLC
- Wet Location Rated
- DLC PRODUCT ID#: S-OLWU8G
- 5 Year Warranty

CAT NO.	HOUSING COLOR	WATTAGE	CCT	LUMENS	VOLTAGE	REPLACES METAL HALIDE	DIMMING
71429D	White	75W	5000K	9,394	120-277V	250W	0-10V

PHOTOMETRY:

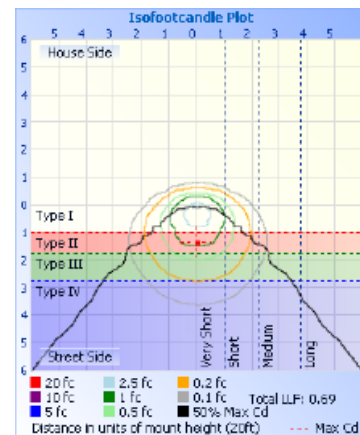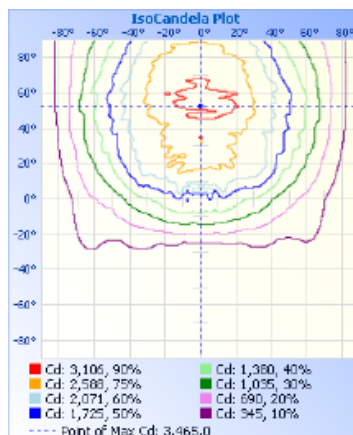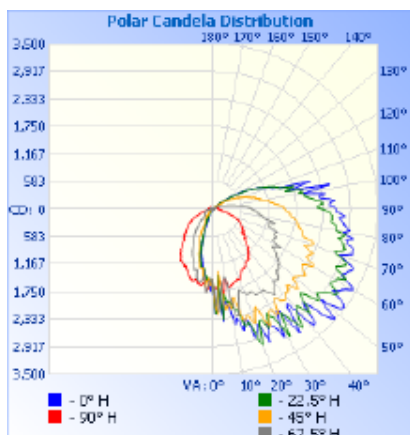



71429D - LED WHITE MEDIUM WALLPACK

120-277V 75W 5000K

TECHNICAL SPECIFICATIONS:

Electrical:

Input Voltage: 120V-277V

Current: see chart pg 1

Frequency: 50/60Hz

Power Factor: $\geq .90$

THD: $<20\%$ @120V

Product Parameters:

Efficacy: 123 lumens per watt

50,000+ Hour L70 Life Span

CCT: 5000K (Cool White)

Chromaticity Measurements:

Beam Angle: 99°

BUG Rating: B1-U5-G5

CRI: 70

R9: -34

Component Specifications:

LED

120V-277V

Dimming: 0-10V

Surge Protection: 6kV

Operating Temperature: -40°F - 104°F

Construction:

Housing: Die Cast Aluminum Alloy Powder Coated Finish

Lens Material: Prismatic Borosilicate Glass Lens Lens: UV Resistant Fire Resistant

Ingress Protection: IP65 Wet Location Rated

Mounting: Wall Mount

Listings:

cETLus

DLC PRODUCT ID#: S-OLWU8G

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).