



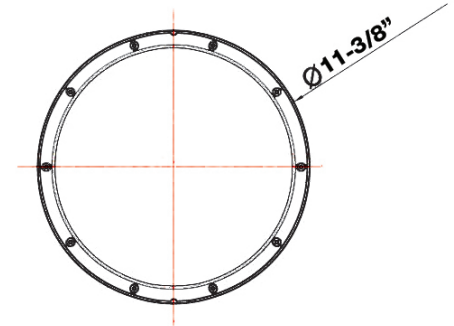

LED Round Garage Canopy Light

60W, 120V-277V, 5000K


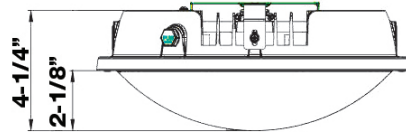


Features:

- Die cast Aluminum Housing, polyester powder coating
- Aluminum Heat Sink, customized fin design for optimal heat dissipation
- Heat Resistant Directed Optics
- Polycarbonate Lens
- 4KV surge protector inside of power supply
- 5 Year Limited Warranty
- IP65 rated Suitable for Wet Locations
- Certification: ETL/cETL

Part#	Input/Wattage	Volts	Lumens	CCT	CRI	Dimming	Light Pattern	Lumens/Watt	DLC Product ID
71613	60	120-277	8,164	5000K	72	N/A	Garage	136	PLUHHQ31TD11

PHOTOMETRY

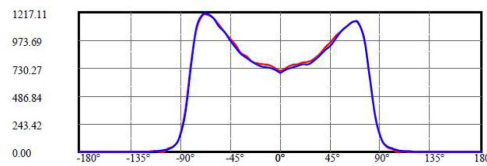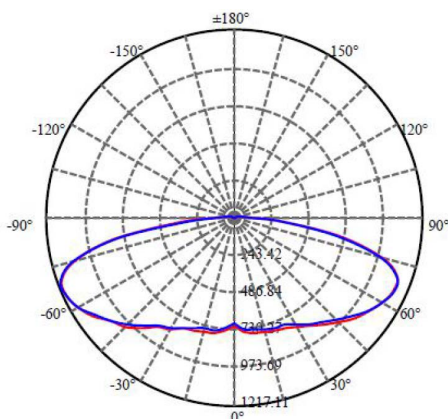

C0/C180: —
 C90/C270: —
 Field angle(10%Imax):C0/180Left:25.4 Right:154.7
 :C90/270Left:25.0 Right:154.8
 Beam Angle(50%Imax):C0/180Left:17.3 Right:146.1
 :C90/270Left:16.9 Right:145.9

1.0m	1217.1 , 909.1 lx	2035.19cm
2.0m	304.3 , 227.3 lx	4070.38cm
3.0m	135.2 , 101.0 lx	6105.57cm
4.0m	76.1 , 56.8 lx	8140.76cm
5.0m	48.7 , 36.4 lx	10175.95cm
6.0m	33.8 , 25.3 lx	12211.14cm
7.0m	24.8 , 18.6 lx	14246.33cm
8.0m	19.0 , 14.2 lx	16281.52cm
9.0m	15.0 , 11.2 lx	18316.71cm
10.0m	12.2 , 9.1 lx	20351.90cm



LED Round Garage Canopy Light

60W, 120V-277V, 5000K

Technical Specifications:

Electrical:

Input Voltage: 120V-277V

Current: .51@120V

Frequency: 50/60Hz

Power Factor: ≥ 0.9

THD: 14% @120V

Product Parameters:

Input Watts: 60

Lumens: 8,164

Efficacy: 136 lumens per watt

50,000+ Hour L70 Life Span

CCT: 5000K (Cool White)

Chromaticity Measurements:

Beam Angle: 365° H X 256° V

DUV: +0.00201

BUG Rating: B3-U2-G3

CRI: >72

R9: -10

Component Specifications:

LED: Lumileds 3030

120V 50-60HZ

Driver Output Volts: 50-70V

Driver Output Amps: 900mA

Surge Protection: 4KV

Dimming: N/A

Operating Temperature:

Minimum Starting -40°F - 104°F.

Construction:

Housing: Aluminum Alloy

Powder Coated

IP Rating: IP65 suitable for wet locations

Lens Material: Heat Resistant Polycarbonate

Lens UV Resistant, Fire Resistant.

Mounting: Hinged Spider Plate.

Listings: ETL

DLC #: PLUHHQ31TD11

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).