



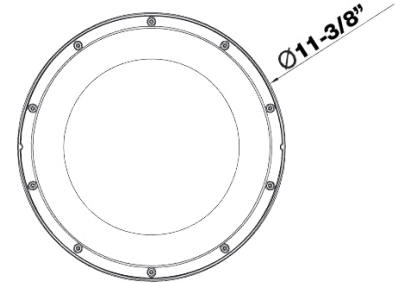

LED Round Walkway Canopy Light

40W, 120V-277V, 5000K





Features:

Die cast Aluminum Housing, polyester powder coating
 Aluminum Heat Sink, customized fin design for optimal heat dissipation
 Heat Resistant Directed Optics.
 Polycarbonate Lens

4KV surge protector inside of power supply
 5 Year Limited Warranty
 IP65 rated
 Certification: ETL/cETL
 Material: Rohs compliant.

Part#	Input/Wattage	Volts	Lumens	CCT	CRI	Dimming	Light Pattern	Lumens/Watt	DLC Product ID
71615	38	120-277	5017	5000K	73	N/A	Walk Way	131	PL5KQ8OOE2SK

PHOTOMETRY

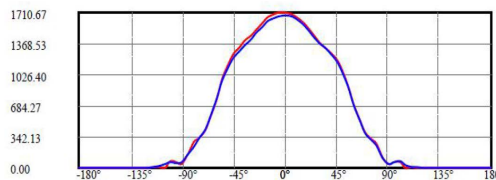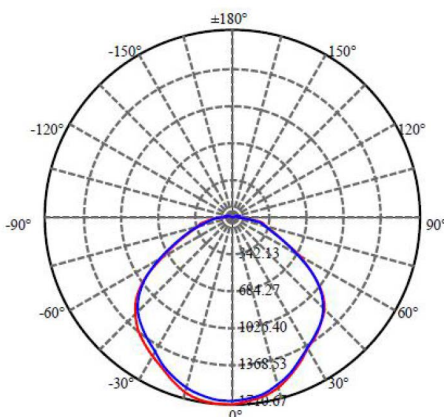

C0/C180: —
 C90/C270: —
 Field angle(10%Imax):C0/180Left:79.2 Right:88.1
 :C90/270Left:83.9 Right:82.9
 Beam Angle(50%Imax):C0/180Left:52.8 Right:61.1
 :C90/270Left:58.1 Right:56.2

1.0m	1710.7 . 1378.8 lx	310.77cm
2.0m	427.7 . 344.7 lx	621.53cm
3.0m	190.1 . 153.2 lx	932.30cm
4.0m	106.9 . 86.2 lx	1243.07cm
5.0m	68.4 . 55.2 lx	1553.83cm
6.0m	47.5 . 38.3 lx	1864.60cm
7.0m	34.9 . 28.1 lx	2175.37cm
8.0m	26.7 . 21.5 lx	2486.14cm
9.0m	21.1 . 17.0 lx	2796.90cm
10.0m	17.1 . 13.8 lx	3107.67cm



LED Round Walkway Canopy Light

40W, 120V-277V, 5000K

Technical Specifications:

Electrical:

Input Voltage: 120V-277V

Current: .33A@120V

Frequency: 50/60Hz

Power Factor: $\geq .91$

THD: 15% @120V

Product Parameters:

Input Watts: 38

Lumens: 5017

Efficacy: 131 lumens per watt

50,000+ Hour L70 Life Span

CCT: 5000K (Cool White)

Chromaticity Measurements:

Beam Angle: 365° H X 256° V

BUG Rating: B2-U2-G1

CRI: 73

R9: -14

Component Specifications:

LED: Lumileds 3030

120V 50-60HZ

Driver Output Volts: 50-70V

Driver Output Amps: 600mA

4KV Surge Protection

Dimming: N/A

Operating Temperature:

Minimum Starting -4°F - 104°F

Construction:

Housing: Aluminum Alloy

Powder Coated

IP Rating: IP65 suitable for wet locations

Lens Material: Heat Resistant Polycarbonate Lens

UV Resistant Fire Resistant

Mounting: Hinged Spider Plate

Listings: ETL Listed

DLC: PL5KQ8OOE2SK

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).