



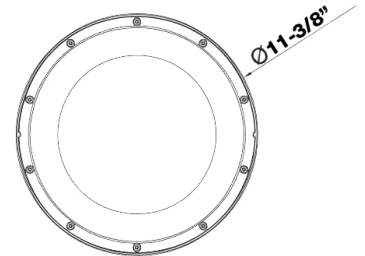

LED Round Walkway Canopy Light

60W, 120V-277V, 5000K





Features:

Die cast Aluminum Housing, polyester powder coating
 Aluminum Heat Sink, customized fin design for optimal heat dissipation
 Heat Resistant Directed Optics
 Polycarbonate Lens

4KV surge protector inside of power supply
 5 Year Limited Warranty
 IP65 rated
 Certification: ETL/cETL
 Material: Rohs compliant.

Part#	Input/Wattage	Volts	Lumens	CCT	CRI	Dimming	Light Pattern	Lumens/Watt	DLC Product ID
71616	60	120-277	7963	5000K	72	N/A	Garage	131	PLTHO104P6IV

PHOTOMETRY

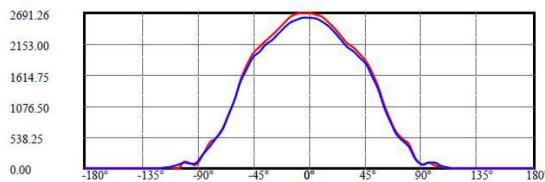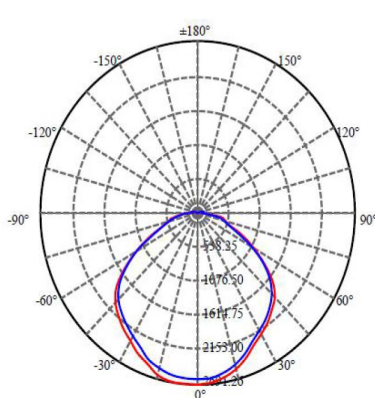

C0/C180: —
 C90/C270: —
 Field angle(10%Imax):C0/180Left:79.2 Right:88.1
 :C90/270Left:83.9 Right:82.9
 Beam Angle(50%Imax):C0/180Left:52.8 Right:61.1
 :C90/270Left:58.1 Right:56.2

1.0m	2691.3 , 2151.0 lx	309.85cm
2.0m	672.8 , 537.7 lx	619.69cm
3.0m	299.0 , 239.0 lx	929.54cm
4.0m	168.2 , 134.4 lx	1239.38cm
5.0m	107.7 , 86.0 lx	1549.23cm
6.0m	74.8 , 59.7 lx	1859.08cm
7.0m	54.9 , 43.9 lx	2168.92cm
8.0m	42.1 , 33.6 lx	2478.77cm
9.0m	33.2 , 26.6 lx	2788.62cm
10.0m	26.9 , 21.5 lx	3098.46cm



LED Round Walkway Canopy Light

60W, 120V-277V, 5000K

Technical Specifications:

Electrical:

Input Voltage: 120V-277V

Current: .51A@120V

Frequency: 50/60Hz

Power Factor: \geq .95

THD: 15% @120V

Product Parameters:

Input Watts: 61

Lumens: 7963

Efficacy: 131 Lumens Per Watt

50,000+ Hour L70 Life Span

CCT: 5000K (Cool White)

Chromacity Measurements:

Beam Angle: 365° H X 256° V

BUG Rating: B3-U2-G2

CRI: >72

R9: -12

Component Specifications:

LED: Lumileds 3030

Driver: 120V 50-60HZ

Driver Output Volts: 50-70V

Driver Output Amps: 900mA

4KV Surge Protection

Dimming: N/A

Operating Temperature:

Minimum Starting -4°F - 104°F

Construction:

Housing: Die Cast Aluminum

Powder Coated

IP Rating: IP65 suitable for wet locations

Lens Material: Heat Resistant Polycarbonate Lens

UV Resistant Fire Resistant

Mounting: Hinged Spider Plate

Listings: ETL

DLC #: PLTHO104P6IV

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).