



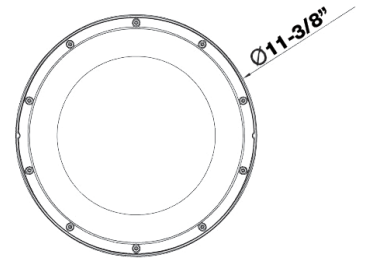

LED Round Walkway Canopy Light

80W, 120V-277V, 5000K





Features:

Die cast Aluminum Housing, polyester powder coating
 Aluminum Heat Sink, customized fin design for optimal heat dissipation
 Heat Resistant Directed Optics.
 Polycarbonate Lens


4KV surge protector inside of power supply
 5 Year Limited Warranty
 IP65 rated
 Certification: ETL/cETL
 Material: Rohs compliant.

Part#	Input/Wattage	Volts	Lumens	CCT	CRI	Dimming	Light Pattern	Lumens/Watt	DLC Product ID
71617	80	120-277	10,206	5000K	73	N/A	365°H X 256°V	133.4	PLTSFM31LJJP

PHOTOMETRY

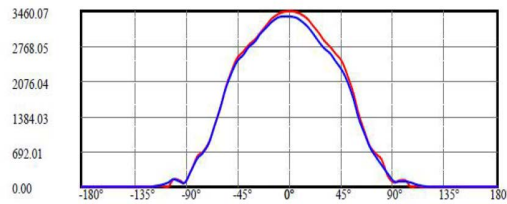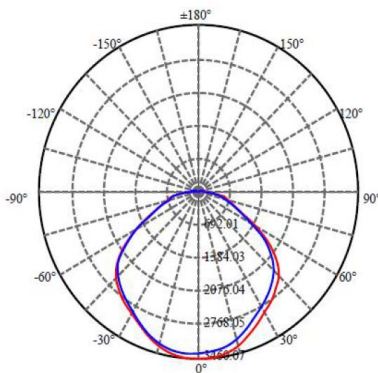

C0/C180: ———
 C90/C270: ———
 Field angle(10%Imax):C0/180Left:84.5 Right:83.1
 :C90/270Left:79.6 Right:87.6
 Beam Angle(50%Imax):C0/180Left:57.9 Right:56.4
 :C90/270Left:53.5 Right:60.9

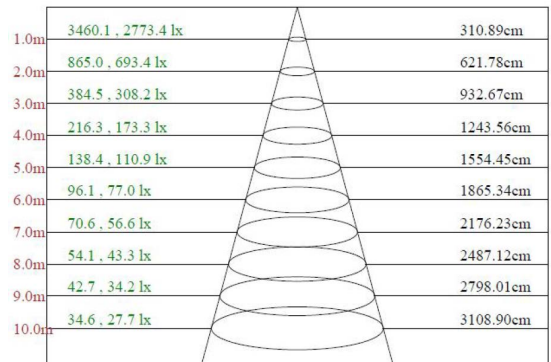

Max . Ave Beam angle of C0plane114.46



LED Round Walkway Canopy Light

80W, 120V-277V, 5000K

Technical Specifications:

Electrical:

Input Voltage: 120V-277V

Current: .65A@120V

Frequency: 50/60Hz

Power Factor: \geq .98

THD: 17% @120V

Product Parameters:

Watts: 80

Lumens: 10,206

Efficacy: 133.4 Lumens Per Watt

50,000+ Hour L70 Life Span

CCT: 5000K (Cool White)

Chromacity Measurements:

Beam Angle: 365° H X 256° V

BUG Rating: B3-U3-G2

CRI: 73

R9: -12

Component Specifications:

LED: Lumileds 3030

Driver: 120V 50-60HZ

Driver Output Volts: 50-70V

Driver Output Amps: 1200mA

4KV Surge Protection

Dimming: N/A

Operating Temperature:

Minimum Starting -4°F - 104°F

Construction:

Housing: Die Cast Alluminum

Powder Coated

IP Rating: IP65 suitable for wet locations

Lens Material: Heat Resistant Polycarbonate Lens

UV Resistant Fire Resistant

Mounting: Hinged Spider Plate

Listings: ETL

DLC #: PLTSFM31LJJP

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).