



Catalog Number 71624
UPC Number 60198671624
Description LED Ultra Thin Recessed Canopy Fixture
 60W
 Voltage: 120/208/240/277



Shown with optional
 recessed mounting Bezel/Trim
 Cat# 71620



Features


- Integral Cooling Fin Releases the Heat Efficiently to Maintain the Life of LEDs and LED Driver
- Corrosion Die Cast Aluminum Housing
- Prismatic Polycarbonate Lens
- Superior Architectural White Powder Coat Finish
- LG LEDs
- Stainless Steel Hardware
- 5 Threaded Apertures - (1) Back, (4) Sides
- 50,000+ Hour Life Expectancy

General

Material: Diecast Aluminum Housing
Lens: Prismatic Polycarbonate Lens
Finish: White Powdercoat
Lamp Type: LED Array
Photocell: Optional
Color Temperature: 5000K

Dimension Information

Length: 8-3/4"
Width: 8-3/4"
Height: 3-5/16"

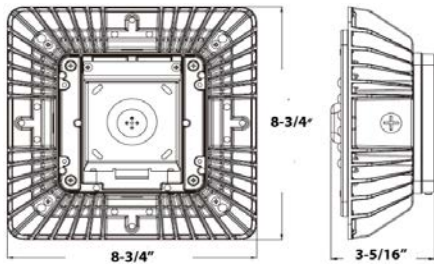

Specifications

Color Temperature: 5000K
Lumens: 6,055
Wattage Rating: 60W
Light Pattern: 153° Beam Angle
CRI: ≥73
Input Current: .49A
Temperature Rating: -40°F to 131°F
Voltage Rating: 120/208/240/277

Packaging

Box Qty 1

Certifications

cULus Yes
DLC Yes
IP65(Nema 4X) Yes
Warranty 5 Year