




LED Backlit Panels

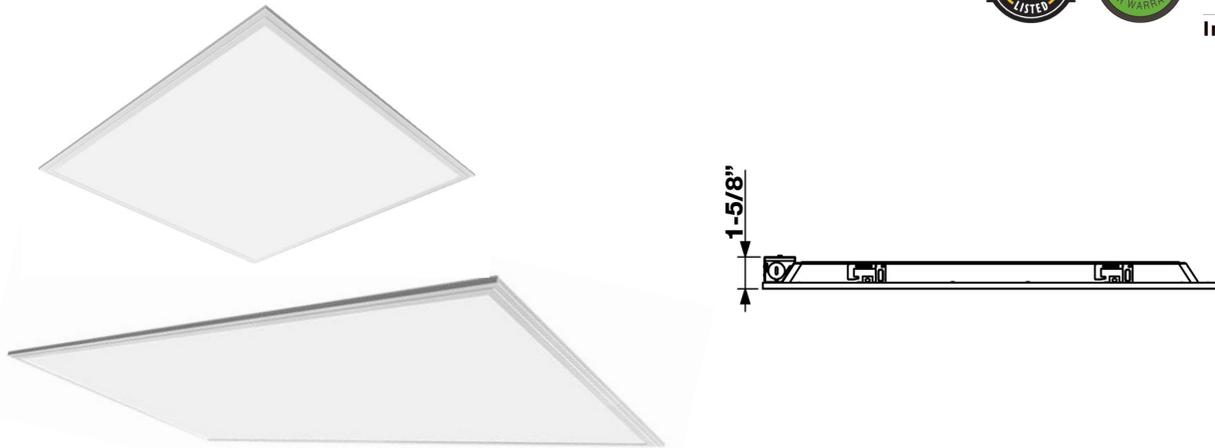

Features:

Replacement for office, hallway, conference room

Polystyrene Lens

Dimmable

IP20 Dry Location Rated

Samsung 2835 LEDs

5 Year Warranty


Operating Temperature: -4°F - 104°F

Part#	Wattage	Volts	Size	Lumens	CCT	CRI	Dimming	Lumens Per Watt	DLC
71767C	30	120-277V	2x2	3,686	4000K	83	0-10V	121	Standard
71761C	40	120-277V	2x2	4,813	4000K	81	0-10V	112	Standard
71762C	40	120-277V	2x2	4,859	5000K	83	0-10V	114	Standard
71777C	40	120-277V	2x4	4,739	4000K	83	0-10V	118	Standard
71778C	40	120-277V	2x4	4,878	5000K	84	0-10V	123	Standard
71771C	50	120-277V	2x4	5,460	4000K	83	0-10V	110	Standard
71772C	50	120-277V	2x4	5,845	5000K	84	0-10V	121	Standard
71174C	20/30/35	120-277V	1x4	4,088	3.5K/4K/5K	83	0-10V	121	Standard
71164C	20/30/35	120-277V	2x2	4,166	3.5K/4K/5K	83	0-10V	123	Standard
71165C	30/35/40	120-277V	2x4	5,403	3.5K/4K/5K	83	0-10V	127	Standard
71764C	20/30/35	120-277V	2x2	3,772	3.5K/4K/5K	83	0-10V	128	Premium
71774C	30/35/40	120-277V	2x4	4,949	3.5K/4K/5K	83	0-10V	126	Premium




LED Backlit Panel Lights


Photometrics

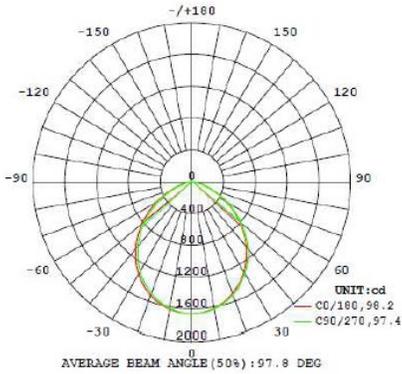


71767C

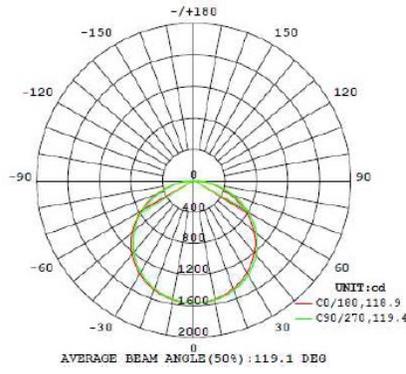


71761C

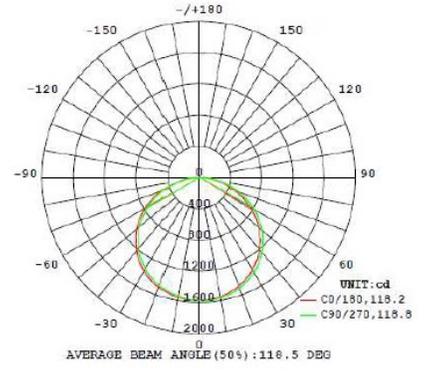


71762C

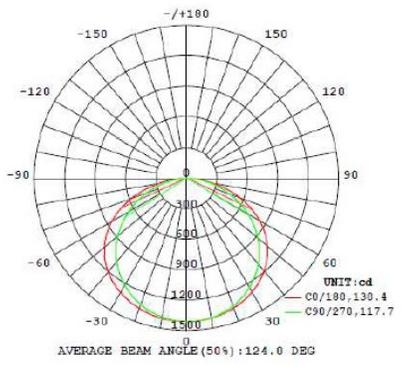


71777C

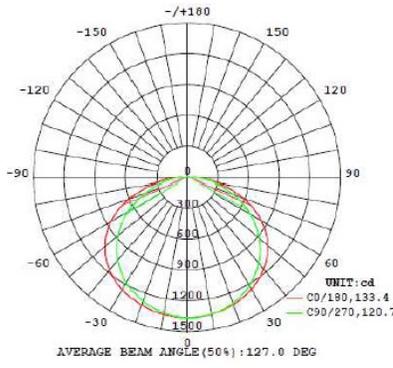


71778C

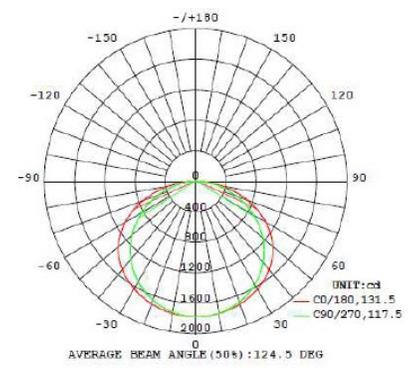


71771C

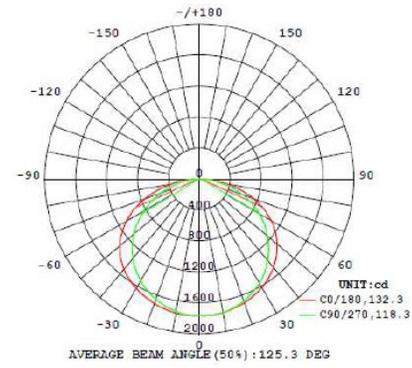


71772C

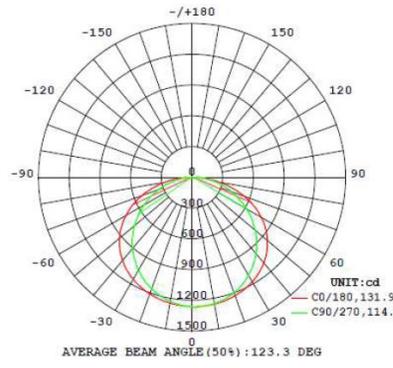


71174C

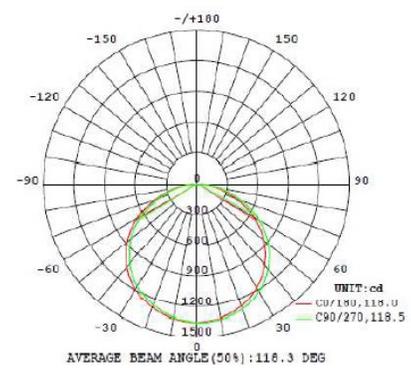


71164C

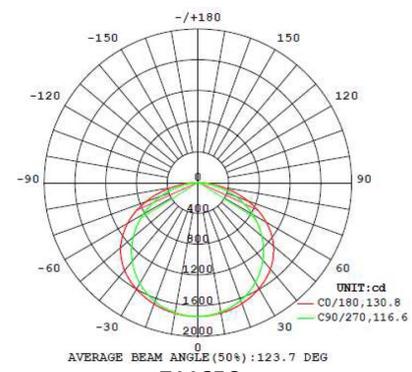

71165C

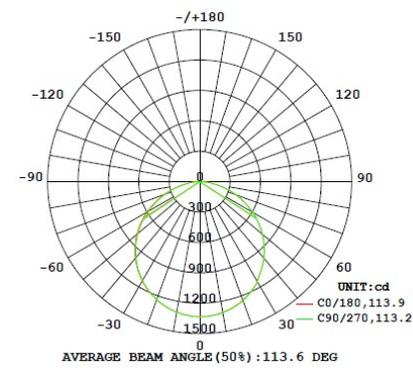

71764C

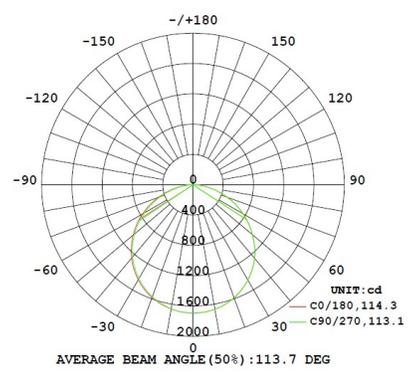

71774C



LED Backlit Panel Lights

Additional Technical Specifications:

Part#	Voltage	Current (A)	THD	DUV	Chromacity (x,y)	Chromacity (u,v)
71767C	120-277V	0.2652	11.7%	0.00128	X=0.3783 Y=0.3781	U=0.2231 V=0.5019
71761C	120-277V	0.3764	13.7%	0.00144	X=0.3803 Y=0.3797	U=0.2238 V=0.5029
71762C	120-277V	0.3756	13.8%	0.00258	X=0.3440 Y=0.3559	U=0.2090 V=0.4866
71777C	120-277V	0.3658	12.5%	0.00038	X=0.3852 Y=0.3805	U=0.2268 V=0.5039
71778C	120-277V	0.3657	13.3%	0.00118	X=0.3448 Y=0.3538	U=0.2104 V=0.4857
71771C	120-277V	0.4155	12.6%	0.00153	X=0.3818 Y=0.3809	U=0.2244 V=0.5036
71772C	120-277V	0.4078	13.8%	0.00228	X=0.3444 Y=0.3556	U=0.2094 V=0.4865
71174C	120-277V	3.5K 0.2827	7.9%	3.5K 0.0007	3.5K X=0.4082 Y=0.3937	3.5K U=0.2364 V=0.5129
		4K 0.2713		4K -0.0003	4K X=0.3756 Y=0.3731	4K U=0.2234 V=0.4992
		5K 0.2838		5K 0.0014	5K X=0.3472 Y=0.3562	5K U=0.2111 V=0.4872
71164C	120-277V	3.5K 0.2827	7.8%	3.5K 0.0005	3.5K X=0.4115 Y=0.3949	3.5K U=0.2380 V=0.5139
		4K 0.2708		4K -0.0003	4K X=0.3788 Y=0.3750	4K U=0.2247 V=0.5006
		5K 0.2821		5K 0.0013	5K X=0.517 Y=0.3595	5K U=0.2129 V=0.4894
71165C	120-277V	3.5K 0.3571	8.1%	3.5K 0.0004	3.5K X=0.4086 Y=0.3933	3.5K U=0.2368 V=0.5128
		4K 0.3444		4K -0.0003	4K X=0.3747 Y=0.3724	4K U=0.2230 V=0.4988
		5K 0.3588		5K 0.0016	5K X=0.3474 Y=0.3566	5K U=0.2111 V=0.4874
71764C	120-277V	3.5K 0.250	15.2%	3.5K 0.0001	3.5K X=0.4083 Y=0.3925	3.5K U=0.2369 V=0.5124
		4K 0.245		4K -0.0003	4K X=0.3749 Y=0.3726	4K U=0.2231 V=0.4989
		5K 0.250		5K 0.0018	5K X=0.3428 Y=0.3534	5K U=0.2092 V=0.4852
71774C	120-277V	3.5K 0.329	12.5%	3.5K -0.0013	3.5K X=0.4020 Y=0.3860	3.5K U=0.2355 V=0.5088
		4K 0.319		4K 0.0015	4K X=0.3775 Y=0.3780	4K U=0.2227 V=0.5017
		5K 0.327		5K 0.0026	5K X=0.3394 Y=0.3521	5K U=0.2074 V=0.4841

Component Specification:

LED: Samsung 2835

50,000+ Hour L70 Life Span

Operating Temperature:

-4°F - 104°F

Construction:

Housing: Aluminum

IP Rating: IP20

Lens Material: Polystyrene

Mounting:

Ceiling

Listings:

ETL Listed

DLC Listed

Carton Qty: 4

Minimum Order Qty: 4

Warranty

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).