




Morris CAT#: 71940A

4' LED Designer Linear Wrap

40W 120-277V 5000K

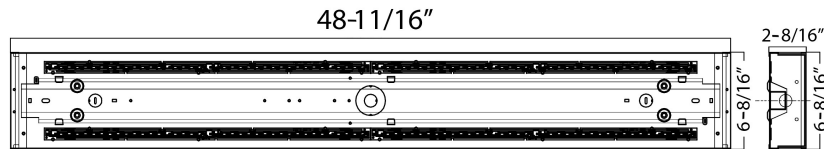


Features:

- Decorative specification Grade Designer Linear Wrap
- Polycarbonate Optical Lens
- Baked Enamel Painted Steel Housing
- 0-10V Dimmable
- Operating Temperature: -22°F-104°F
- 50,000+ Hour Life Expectancy
- Linkable - Hardware Included
- IP40 Damp Location Rated
- Suitable for Damp Locations
- Certification: cULus
- 5 Year Limited Warranty

Part#	Input/Wattage	Volts	Lumens	CCT	CRI	Lumens/Watt	Dimming	Light Pattern	
71940A	40	120-277	4,800	5000K	83	120	0-10V	118° X 98°	



PHOTOMETRY

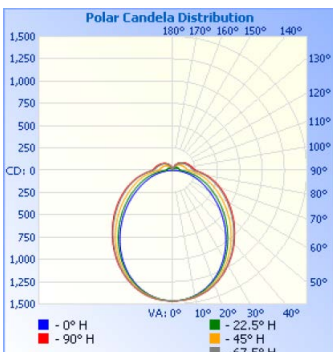

Illuminance at a Distance

	Center Beam fc	Beam Width
3.3ft	134 fc	7.4 ft 10.9 ft
6.7ft	32.6 fc	15.1 ft 22.0 ft
10.0ft	14.6 fc	22.5 ft 32.9 ft
13.3ft	8.27 fc	29.9 ft 43.8 ft
16.7ft	5.25 fc	37.6 ft 54.9 ft
20.0ft	3.66 fc	45.0 ft 65.8 ft

■ Vert. Spread: 96.8°
■ Horiz. Spread: 117.4°

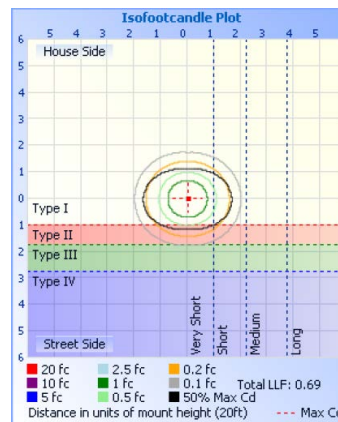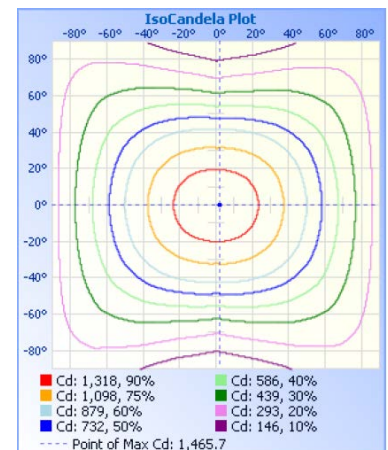



Morris CAT#: 71940A

4' LED Designer Linear Wrap

40W 120-277V 5000K

Technical Specifications:

Electrical:

Input Voltage: 120-277V

Current: 0.34A

Frequency: 50/60Hz

Power Factor: 0.93

THD: 12.69%

Product Parameters:

Input Watts: 40

Lumens: 4,800

Efficacy: 120 Lumens per watt

50,000+ Hour L70 Life Span

CCT: 5000K

Chromacity Measurements:

Beam Angle: H: 98.3 V: 118.4

CRI: 83

R9: 7

Component Specifications:

LED: SMD2835

BUG: B2 U3 G1

120V 50-60HZ

Driver Output Volts: 34V DC

Driver Output Amps: 1050 mA

LED Input Volts: 2.8V DC

LED Input Amps: 40 mA

2.5KV Surge Protection

Dimming: 0-10V

Operating Temperature:

Minimum Starting -22°F-104°F

Construction:

Baked Enamel Painted Steel Housing

IP40 Rated

Lens Material: PC Optics

Mounting: Surface Mount

Listings: cULus

Mounting Accessories:

- Microwave Motion Sensor- CAT #: 71729A
- Remote Control For Microwave Motion Sensor - CAT#: 71736A

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).