




Morris CAT#: 71950A

4' LED Designer Linear Wrap

40W 120-277V 4000K

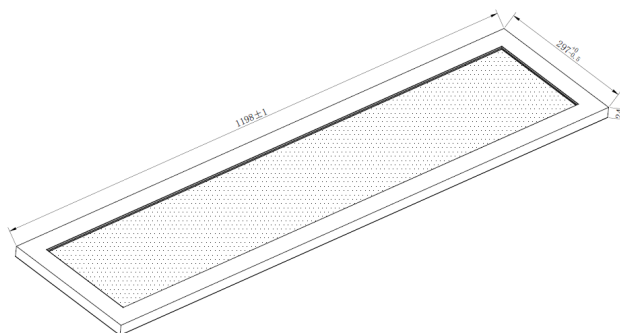


Features:

- Decorative specification Grade Designer Linear Wrap
- Up/Down Light Distribution
- 50% Up / 50% Down Ratio
- Low Profile infrastructure Design
- Suspension Kit Included
- Heavy Gauge Aluminum Housing
- Aluminum Heat Sink
- Directed Optics Lens
- 0-10V Dimmable
- Operating Temperature: -22°F-104°F
- 50,000+ Hour Life Expectancy
- Guaranteed Single Bin Color Consistency
- Certification: cULus
- IP20 Rated
- Suitable for Dry Locations
- 5 Year Limited Warranty



Part#	Input/Wattage	Volts	Lumens	CCT	CRI	Lumens/Watt	Dimming	Light Pattern
71950A	40	120-277	4,104	4000K	83	110	0-10V	158° X 158°

PHOTOMETRY

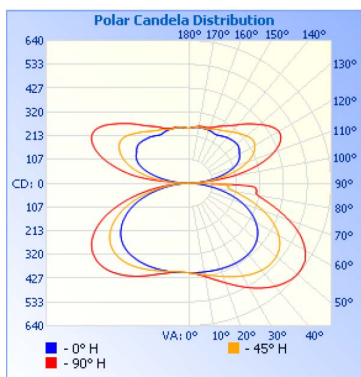

Illuminance at a Distance			
Center Beam fc	Beam Width		
20.0ft	1.00 fc	85.7 ft	167.2 ft
40.0ft	0.25 fc	171.3 ft	334.3 ft
60.0ft	0.11 fc	257.0 ft	501.5 ft
80.0ft	0.06 fc	342.6 ft	668.6 ft
100.0ft	0.04 fc	428.3 ft	835.8 ft

■ Vert. Spread: 129.9°
 ■ Horiz. Spread: 153.1°

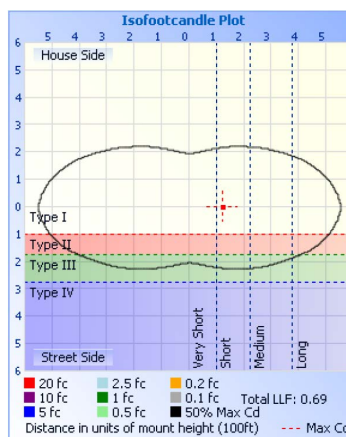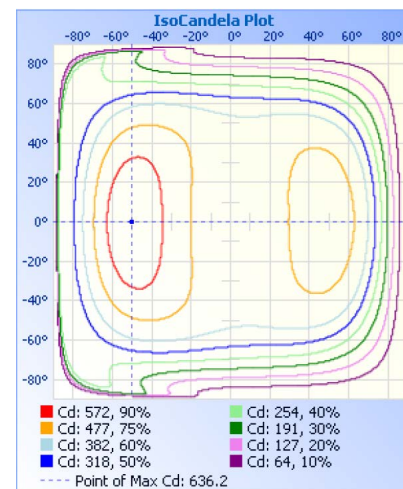



CAT#: 71950A

4' LED Designer Linear Wrap

40W 120-277V 4000K

Technical Specifications:

Electrical:

Input Voltage: 120-277V

Current: 0.32A@ 120V

Frequency: 50/60Hz

Power Factor: 0.95

THD: 13%

Operating Temperature: -22°F-104°F

Construction:

Heavy Gauge Aluminum Housing

IP20 Rated

Lens Material: Frosted PC

Product Parameters:

Input Watts: 40

Lumens: 4,104

Efficacy: 110 Lumens per watt

50,000+ Hour L70 Life Span

CCT: 5000K

Mounting: Suspended Mount

Listings: cULus

Mounting Accessories:

- Suspension Kit - CAT #: 71952A

Chromaticity Measurements:

Beam Angle: H158.2 V158.8

CRI: 83

R9: 11

SCDM: <7

UGR: <19

BUG: B1 U5 G1

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).

Component Specifications:

LED: SMD2835

Driver: 120-277V 50-60HZ

Driver Output Volts: 40V / DC

Driver Output Amps: 850mA

LED Input Volts: 2.8V / DC

LED Input Amps: 38.5 mA

2.5 KV Surge Protection

Dimming: 0-10V