




Morris CAT#: 71953A

4' LED Designer Linear Wrap

40W 120-277V 5000K

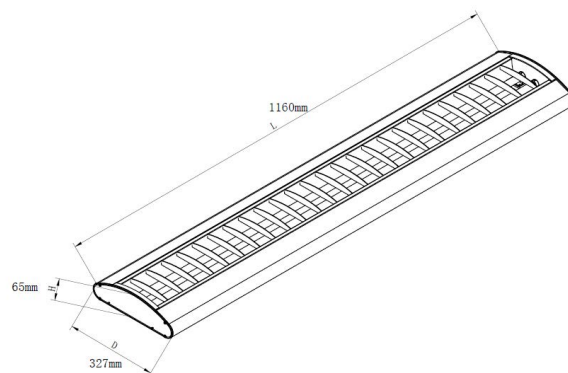


Features:

- Decorative specification Grade Designer Linear Wrap
- 104° X 134° Down Light Distribution
- Low Profile infrastructure Design
- Suspension Kit Included
- Heavy Gauge Steel Housing
- Aluminum Heat Sink
- Directed Optics Lens
- 0-10V Dimmable
- Operating Temperature: -22°F-104°F
- Guaranteed Single Bin Color Consistency
- Certification: cULus
- IP20 Rated
- Suitable for Dry Locations
- 50,000+ Hour Life Expectancy
- 5 Year Limited Warranty

Part#	Input/Wattage	Volts	Lumens	CCT	CRI	Lumens/Watt	Dimming	Light Pattern	
71953A	40	120-277	5,070	5000K	80	125	0-10V	104° X 134°	

PHOTOMETRY

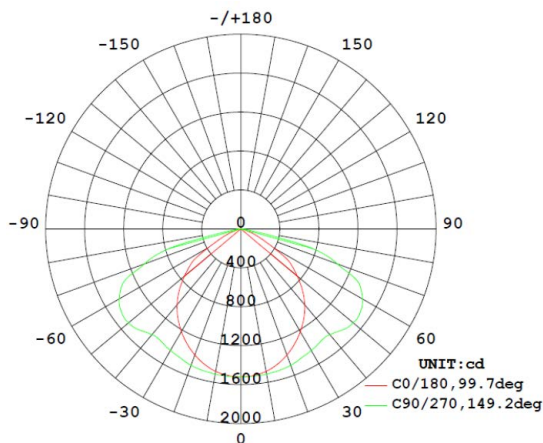



Morris CAT#: 71953A

4' LED Designer Linear Wrap

40W 120-277V 5000K

Technical Specifications:

Electrical:

Input Voltage: 120-277V
Power Factor: 0.95
Current: 0.32
Frequency: 50/60Hz
THD: 20%

Product Parameters:

Input Watts: 40
Lumens: 5,070
Efficacy: 125 Lumens per watt
50,000+ Hour L70 Life Span
CCT: 5000K

Chromaticity Measurements:

SCDM: <7
Beam Angle: H104.3 V134.4
CRI: 80
UGR: <19
R9: 10
BUG: B2 U2 G2

Component Specifications:

LED: SMD2835

Driver: 120-277V 50-60HZ
Driver Output Volts: 36V / DC
Driver Output Amps: 1200mA

LED Input Volts: 2.8V DC
LED Input Amps: 38.6 mA

2.5 KV Surge Protection

Dimming: 0-10V

Operating Temperature: -22°F-104°F

Construction:

Heavy Gauge Aluminum Housing

IP20 Rated

Lens Material: Directed Optics

Mounting: Suspended Mount

Listings: cULus

Mounting Accessories:

- Suspension Kit - CAT #: 71952A
- Frosted Lens - CAT#: 71956A
- Connection Kit - CAT#: 71957A

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).