




Morris CAT#: 71961A

LED Designer Linear Wrap

60W 120-277V 4000K

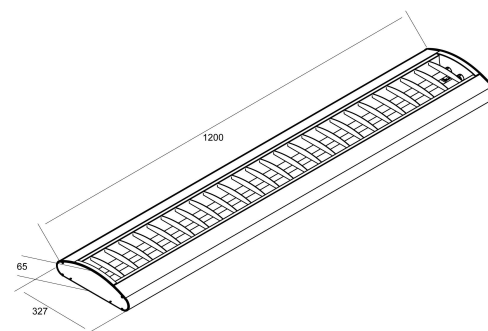


Features:

- Decorative specification Grade Designer Linear Wrap
- Up/Down Light Distribution
- 50% Up/50% Down Ratio
- Attractive Low Profile Semi-Circular Wing Design
- Suspension Kit Included
- Heavy Gauge Steel Housing
- Aluminum Heat Sink
- Directed Optics Louvered Lens
- 0-10V Dimmable
- Operating Temperature: -22°F-104°F
- Guaranteed Single Bin Color Consistency
- Certification: cULus
- IP20 Rated
- Suitable for Dry Locations
- 50,000+ Hour Life Expectancy
- 5 Year Limited Warranty

Part#	Input/Wattage	Volts	Lumens	CCT	CRI	Lumens/Watt	Dimming	Light Pattern	
71961A	60	120-277	6,195	4000K	80	130	0-10V	H102.1°V44.1°	

PHOTOMETRY

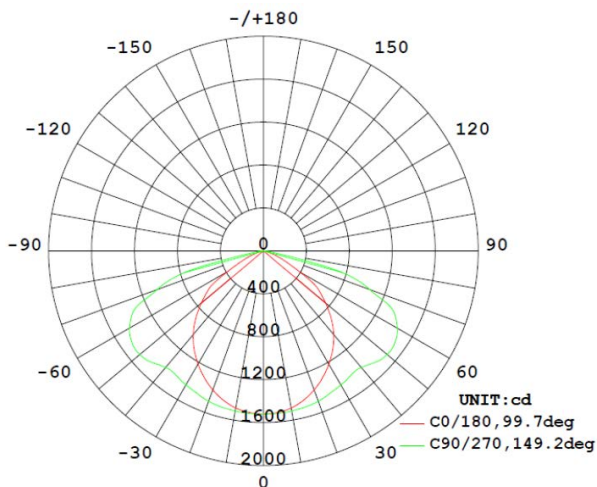



Morris CAT#: 71961A

LED Designer Linear Wrap

60W 120-277V 4000K

Technical Specifications:

Electrical:

Input Voltage: 120-277V

Current: 0.38A

Frequency: 50/60Hz

Power Factor: 0.95

THD: 13%

Operating Temperature: -22°F-104°F

Construction:

Heavy Gauge Steel Housing IP 20 Rated

Lens Material: Louvered Directed Optics

Mounting: Suspended Mount

Listings: cULus

Mounting Accessories:

- Suspension Kit (Included with Fixture) - CAT #: 71952A
- Emergency Battery Backup Kit - CAT#: 71915A

Product Parameters:

Input Watts: 60

Lumens: 6,195

Efficacy: 130 Lumens per watt

50,000+ Hour L70 Life Span

CCT: 4000K

Chromaticity Measurements:

Beam Angle: H104.3°V134.4°

SCDM: <7

CRI: 82

UGR: <19

R9: 10

BUG: B1 U5 G1

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).

Component Specifications:

LED: SMD2835

Driver: 120-277V 50-60HZ

Driver Output Volts: 46V / DC

Driver Output Amps: 1200mA

LED Input Volts: 2.8V DC

LED Input Amps: 40 mA

2.5KV Surge Protection

Dimming: 0-10V