




71975 - 4' ECONOMY WRAP

40W 120-277V 4000K

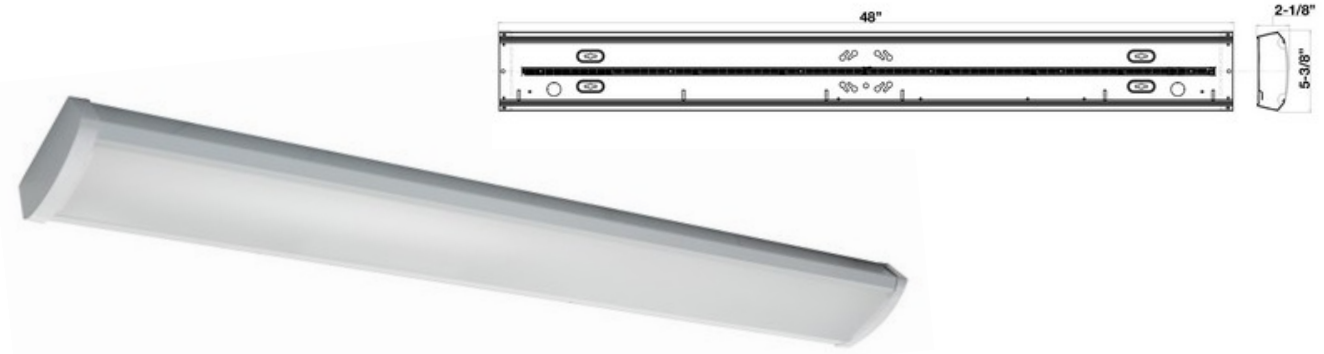


FEATURES:


- Excellent replacement for linear fluorescent Wrap around fixtures
- 0-10V Dimmable
- Compatible with most LED dimmers
- Heavy Gauge Steel Housing
- PMMA Frosted Diffuser
- 50,000+ Hour LED Life Expectancy
- IP20 Rated
- Environment: Indoor Rated
- cULus Listed
- 5 Year Warranty

Part#	Input/Wattage	Volts	Lumens	CCT	CRI	Lumens/Watt	Dimming	Light Pattern	DLC Product ID #
71975	40W	120-277V	4,875	4000K	82	126lm/w	0-10V	106° X 126°	PO24ZP0X

PHOTOMETRY

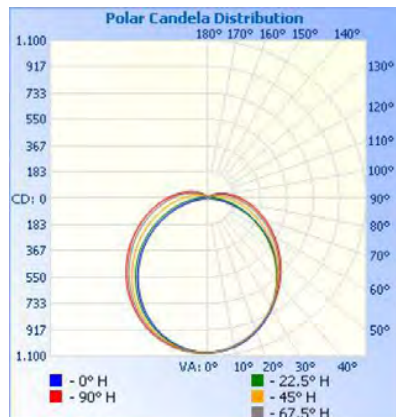

Center Beam fc	Beam Width
3.72 fc	47.5 ft
0.93 fc	95.0 ft
0.41 fc	142.6 ft
0.23 fc	190.1 ft
0.15 fc	237.6 ft
0.10 fc	285.1 ft

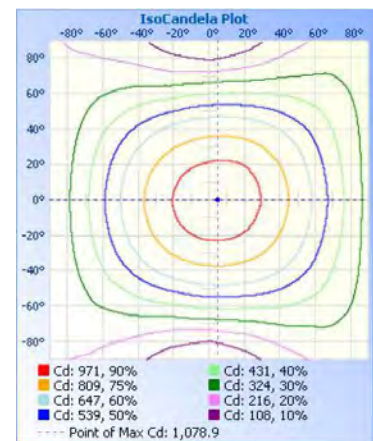



71975 - 4' ECONOMY WRAP

40W 120-277V 4000K

Technical Specifications:

Electrical:

Input Voltage: 120-277V

Current: 0.31A

Frequency: 50/60Hz

Power Factor: 0.99

THD: 6.9%

Product Parameters:

Input Watts: 40W

Lumens: 4,875

Efficacy: 126 Lumens per watt

50,000+ Hour L70 Life Span

CCT: 4000K

Chromaticity Measurements:

Beam Angle: H106.8 V125.5

CRI: 82

UGR: <18

R9: 5

Component Specifications:

LED: Seoul 3528

BUG: B1 U3 G1

120V 50-60HZ

Driver Output Volts: 42V DC

Driver Output Amps: 700 mA LED

2.5KV Surge Protection

Dimming: 0-10V

Operating Temperature:

Minimum Starting -22°F-104°F

Construction:

Heavy Gauge Steel Housing

IP20 Rated

Lens Material: PC Optics

Mounting: Surface Mount

Listings: cULus, DLC

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).