




72302A - SQUARE BOLLARD

14/19/24W 3/4/5K 120-277V BRONZE



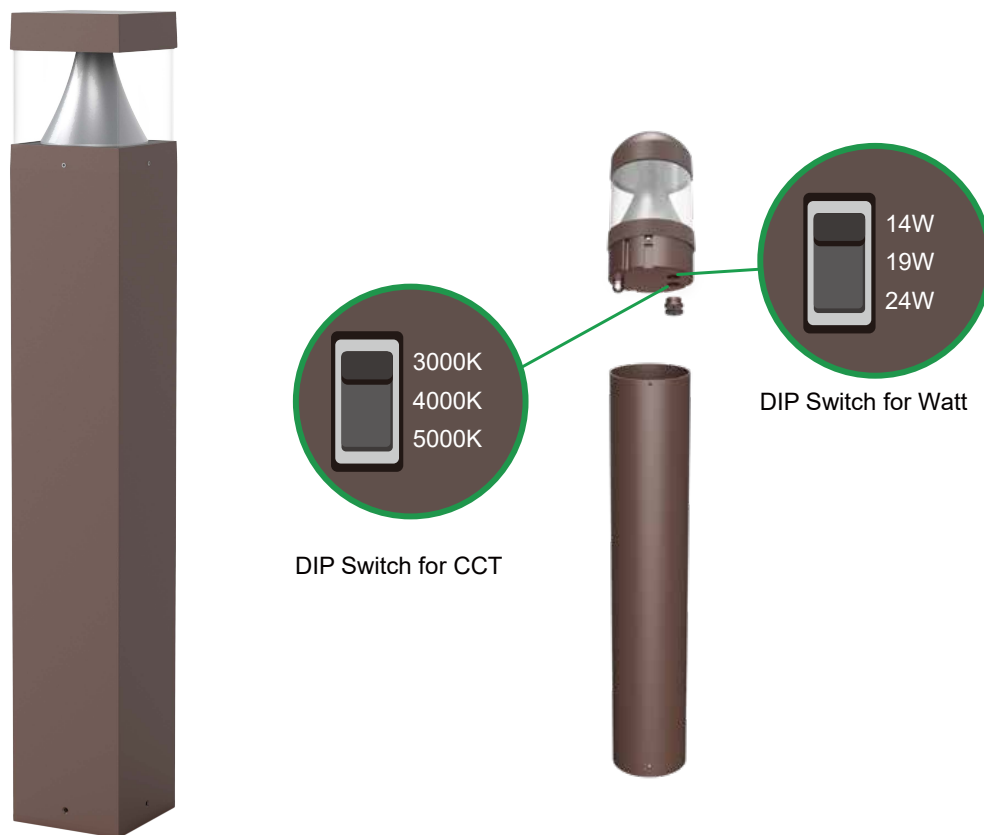


FEATURES:

- Color Selectable: 3000K/4000K/5000K
- Wattage Selectable: 14W/19W/24W
- Includes both bollard base and top
- Corrosion Resistant Die Cast Aluminum Housing - Bronze Powder Coat Finish
- IP65 Rated for Wet Locations
- IK08 Impact Rated - Protected against 5 joules of impact
- 5 Year Warranty

CAT NO.	HOUSING COLOR	WATTAGE	CCT	MAX LUMENS	VOLTAGE	TYPE	CRI	DIMMING
72302A	BRONZE	14/19/24W	3K/4K/5K	3,020	120-277V	SQUARE FLAT CONE	>70	0-10V

PHOTOMETRY:

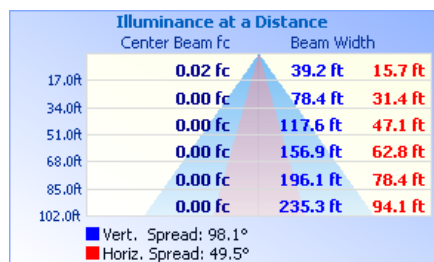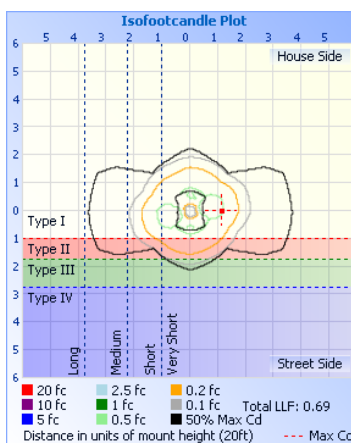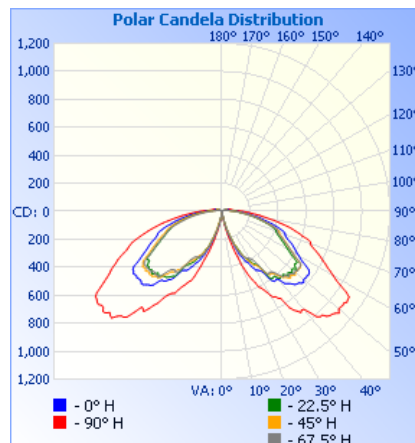



72302A - SQUARE BOLLARD

14/19/24W 3/4/5K 120-277V BRONZE

TECHNICAL SPECIFICATIONS

ELECTRICAL:

Input Voltage/Frequency: 120-277V, 50/60Hz

THD: 4.49%

Power Factor: >0.9

Current: 0.19A @ 120V

Surge Protection: 4kV

PRODUCT PARAMETERS:

Input Watts: 14W/19W/24W

Maximum Lumens: 3,020

Efficacy: 126 LM/W

50,000+ Hour LED Life Span

CCT: 3K/4K/5K

CHROMACITY:

Beam Angle: 100°

CRI: >70

R9: -33

Dimming: 0-10V

Operating Temperature: -40°F - 122°F

CONSTRUCTION:

Housing: Corrosion Resistant Die Cast


Aluminum, Black Powder Coat Finish

Lens: Polycarbonate

Mounting: See bolt pattern

WARRANTY: Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).

PRODUCT DIMENSIONS:

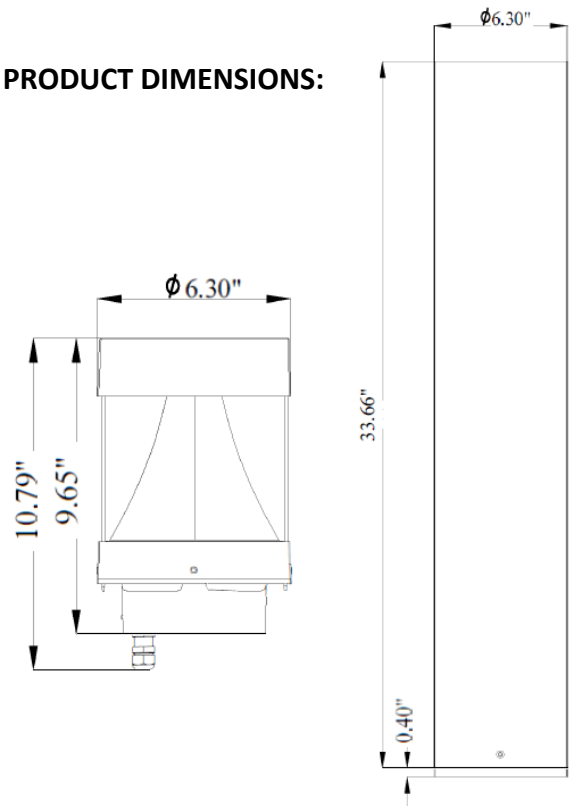

LUMEN BREAKDOWN:

	3000K	4000K	5000K
14W	1730	1760	1750
19W	2360	2460	2420
24W	2930	3020	3000

BOLT PATTERN:

