




72676 - NEW CONSTRUCTION DOWNLIGHT

120V 10W 3000K BAFFLE

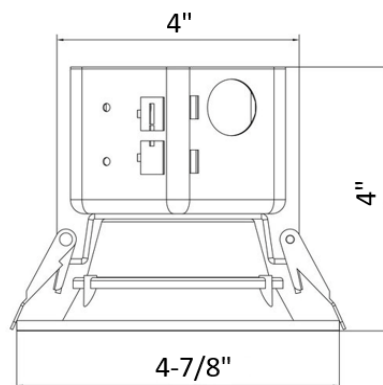


FEATURES:

- Driverless Technology
- Aluminum Housing
- Includes Integral 4" Junction Box
- Torsion Spring Brackets for Mounting to Sheetrock
- Triac Dimming Technology (120V Only)
- Operating Temp: -31°F to 122°F
- IC (Insulation Contact) Rated
- Certification: cETLus, ES
- IP44 Rated for Wet Locations
- 5 Year Limited Warranty


Part#	Input/Wattage	Volts	Lumens	CCT	CRI	Lumens/Watt	Dimming	Listing
72676	10W	120V	847	3000K	82	85	Triac	cETLus

PHOTOMETRY

4.1 Spectral Distribution

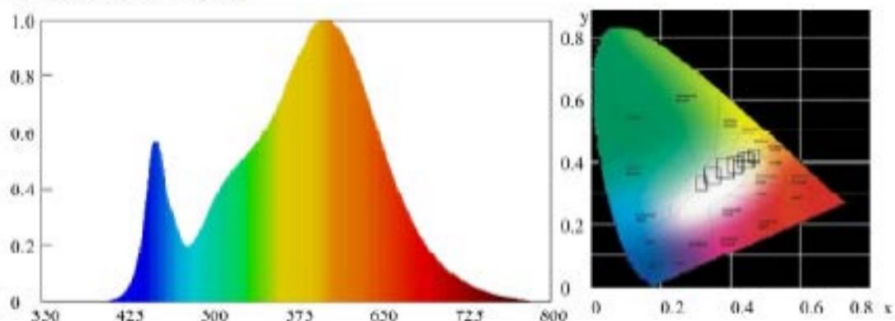

4.2 ANSI Chromaticity Quadrangles Diagram

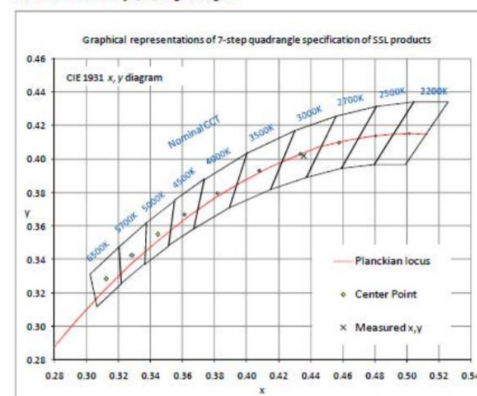



72676 - NEW CONSTRUCTION DOWNLIGHT

120V 10W 3000K BAFFLE

Technical Specifications:

Electrical:

Input Voltage: 120
Current: 0.083A @ 120V
Frequency: 50-60Hz
Power Factor: ≥ 0.99
THD: 15%

Product Parameters:

Wattage: 10W
Lumens: 847
Efficacy: 85 lm/ watt
50,000+ Hour L70 Life Span
CCT: 3000K

Chromaticity Measurements:

SCDM: < 7
Beam Angle: 101
DUV: -0.0009
UGR Rating: < 19
CRI: 82
R9: 9
Chromaticity (x,y): x= .4362; y= .4701
Chromaticity (u,v): x= .2511; y= .3469

Component Specifications:

LED: SMD2835
Driver: 120-277V
50-60HZ
Driverless Light Engine
Light Engine Output Volts: N/A
Light Engine Output Volts: 150 mA
Surge Protection: 1.0 KV

Dimming: Triac

Operating Temperature:

Minimum Starting -31° - 122° F

Construction:

Housing: Aluminum Housing/Trim - White Finish

IP Rating: IP44 Indoor Wet Location Rated Lens

Material: Polycarbonate Lens

Lens: UV Resistant, Fire Resistant

Mounting: Ceiling Mount (Sheetrock)

Listings: cETLus, ES, IC Rated

Carton Qty: 12

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).