




72692 - 8" COMMERCIAL RECESSED W/ EMERGENCY BACKUP

120-277V 30W 4000K





FEATURES:

- Ideal for Retrofit Downlight Applications
- Pre-Installed Emergency Battery Backup - Minimum 90 Minute Run Time in Emergency Mode
- 0-10V Dimmable Down to 10%
- Compatible with most LED Dimmers
- Operating Temp: -31°F to 122°F
- IC (Insulation Contact) Rated
- 8" includes 15" Greenfield Wire Whip to Driver and Line Side with Box Connectors
- Certification: cETLus, ES
- IP43 Rated for Damp Locations
- 5 Year Limited Warranty

Part#	Input/Wattage	Volts	Lumens	CCT	CRI	Dimming	Light Pattern	Lumens/Watt
72692	30W	120-277	2,900	4000K	>90	0-10V	60°	97

PHOTOMETRY

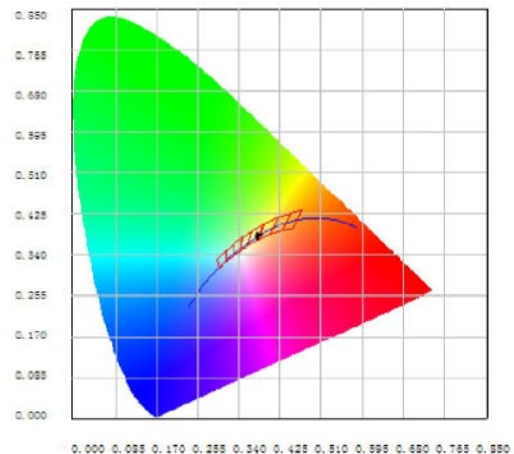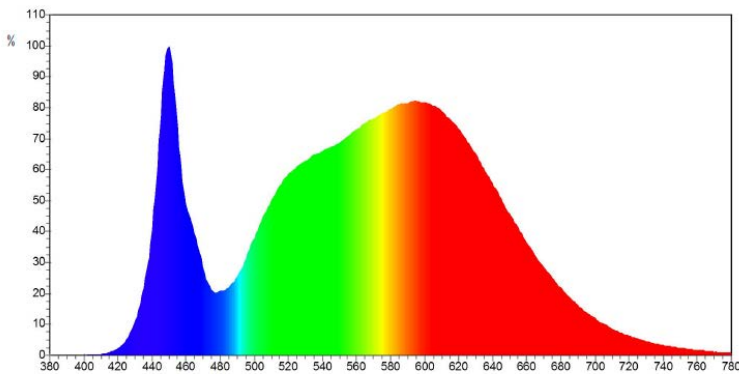



72692 - 8" COMMERCIAL RECESSED W/ EMERGENCY BACKUP

120-277V 30W 4000K

Technical Specifications:

Electrical:

Input Voltage: 120-277V \bar{A}

Current: .31A @ 120V

Frequency: 50-60Hz

Power Factor: \geq .99

THD: >20%

Product Parameters:

Input Watts: 30

Lumens: 2,900

Efficacy: 97 lumens per watt

>50,000+ Hour L70 Life Span

CCT: 4000K

Chromaticity Measurements:

SCDM: <7

Beam Angle: 60

DUV: -0.0009

UGR Rating: <12

CRI: >90

R9: 9

Component Specifications:

LED: SMD 2835

Driverless Light Engine

Light Engine Output Volts: N/A

Light Engine Output Amps: 150 mA

120V-277V 50-60HZ

Surge Protection:

Dimming: 0-10V

Operating Temperature: -31°F-122°F

Construction:

Aluminum Housing - Paintable

IP43 Rated

Lens Material: PC

LensKUV Resistant, Fire Resistant

Mounting: Ceiling Mount

Listings: cETLus, ES

Warranty: Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).