



72783C - 8" WAFER DOWNLIGHT

18W 120V 5CCT SMOOTH




FEATURES:

- 5 CCT COLOR SELECTABLE: 2700K, 3000K, 3500K, 4000K, 5000K
- 120° beam angle
- cETLus, Energy Star Listed
- IC rated for direct contact with insulation
- Wet-location rated, ideal for bathrooms, laundry, porches and garage work rooms
- No existing recessed housing or junction box required. Suitable for most new constructions
- With Smooth Trim
- Title 24/JA8 Compliant for High Efficacy LED Lighting in California
- Edge lit technology, with no glare or dark spots
- Built with the highest quality 120V drivers, ensuring energy efficiency

CAT NO.	SIZE & TRIM	WATTAGE	LUMENS	CCT	VOLTAGE	CRI	REPLACES INCANDESCENT	ENERGY STAR
72783C	8" SMOOTH	18W	1,440	2700/3000/3500/4000/5000K	120V	≥90	100W	YES

PRODUCT DIMENSIONS:

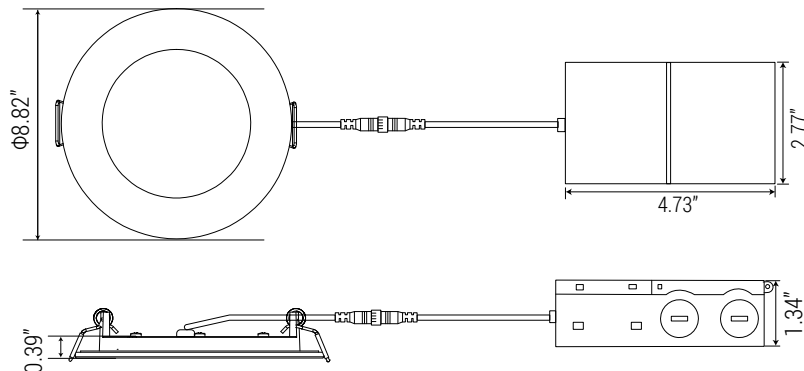



72783C - 8" WAFER DOWNLIGHT

18W 120V 5CCT SMOOTH

TECHNICAL SPECIFICATIONS:

VOLTAGE: 120V

POWER FREQUENCY: 60 Hz

POWER FACTOR: > 0.9

5 CCT: 2700K/3000K/3500K/4000K/5000K

CRI: 90

LUMENS PER WATT: 80

BEAM ANGLE: 120 Degrees

LIFESPAN: >50,000 Hours

OPERATING TEMP: Minimum Starting -4° - 113° F

DIMMABLE: Compatible with most triac dimmers to give user a smooth 100%-5% dimming to

choose the desired brightness.

WARRANTY:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).

CONSTRUCTION:

HOUSING: PS driver housing and Aluminum reflector with architectural white finish

IP RATING: IP43 Wet Indoor Location Rated

LENS MATERIAL: Adjustable Frosted Polycarbonate Lens

MOUNTING: No existing recessed housing or junction box required. Suitable for most new constructions.

Install J-Box in ceiling beam, and insert light right into drywall opening.

LISTINGS: cETLus, Energy Star V1.0, Title 24/JA8 Compliant

CARTON QTY: 24

N.W./Box: 0.554 Kg

G.W./Box: 16.4 Kg

CBM Shipping Box: 0.073

Easily flip the switch for desired CCT



Product View



Beam Angle 120°

