




Catalog Number 73114/73115  
UPC Number  
Description LED Emergency Light  
High Output LED Lamps

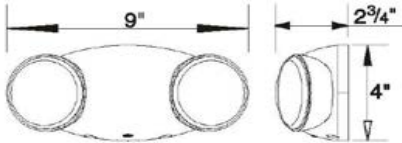

#### Features

- Completely Self-Contained
- Fully Automatic Operation
- Compact, Low Profile Designs in Neutral Finish
- Push to Test Switch
- 6-Volt.Maintenance Free Ni-Cad Battery
- Environmental Coated, Solid State Charger
- 2 x 12 LED Fully Adjustable Glare Free Lamps
- Automatic, Low Voltage Disconnect (LVD)
- Universal Transformer for 120 or 277 VAC
- Universal J-Box Mounting Plate
- Injection Molded, V-O Flame Retardant, High Impact, Thermoplastic Housing
- Charge Rate/Power on LED Indicator Light
- 90 Minute Emergency Operation
- Damp Location Rated

#### Dimension Information

L Inches (mm) 9  
H Inches (mm) 4.00  
Depth Inches (mm) 2.75

#### Specifications

Input Rating Amps: 0.06  
Input Rating Watts: 6.7 @ 120V 7.3 @ 277V  
Output Load: 10.8W Integral  
Lamp Type: LED - 76 Lumen Per Head  
Voltage Rating: 120/277  
Flammability Rating: UL94V-0  
Battery Operation: 6 Volt Nickel Cadmium - 90 Minutes Minimum

#### Packaging

Box Qty 1  
Master Carton Qty 6

#### Certifications

UL UL 924  
cUL No  
RoHS Yes