




Catalog Number 73158
UPC Number 60198673158
Description Recessed Emergency Light
Incandescent

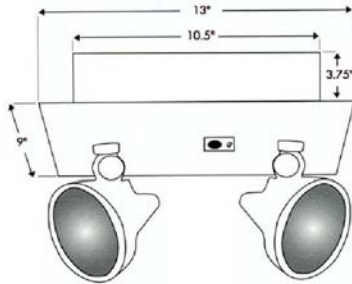

Features

Recessed emergency lighting unit mounts flush with ceiling for a concealed, unobtrusive look
Twin Emergency Exit Lights are Completely self-contained
Compact, flush mount design
Mounting bar hangers included
6-volt, pure lead, maintenance-free battery
Environmentally-coated, solid state charger
Automatic, low voltage disconnect (LVD)
Universal transformer for 120 or 277 VAC
Injection-molded, V-O flame retardant, high impact, thermoplastic housing
Charge rate/power on LED indicator light
Large battery for remote capacity
Push to test switch
90 minute emergency operation
6 Volt 7.2Watt #939 lamp
Remote capable
ETL Listed

Dimension Information

Length Inches 13.00"
Housing Dimension: 10.5" x 3.75"
Width Inches: 9.00"
Depth Inches: 4.00"

Specifications

Input Rating Amps: 0.06
Input Rating Watts: 6.7 @ 120V 7.3 @ 277V
Output Load: 10.8W Integral
Lamp Type: 5.4W Incandescent
Voltage Rating: 120/277
Flammability Rating: UL94V-0
Battery Operation: 6 Volt Lead Acid - 90 Minutes Minimum

Packaging

Box Qty 1
Master Carton Qty 6

Certifications

UL UL 924
cUL No
RoHS Yes